



# JUKO ELECTRONICS INDUSTRIAL CO., LTD. SUPER TURBO (VER. C1-B)

<b>Processor</b>	8088 (exact location unidentified)
<b>Processor Speed</b>	4.77/12/15MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087 (exact location unidentified)

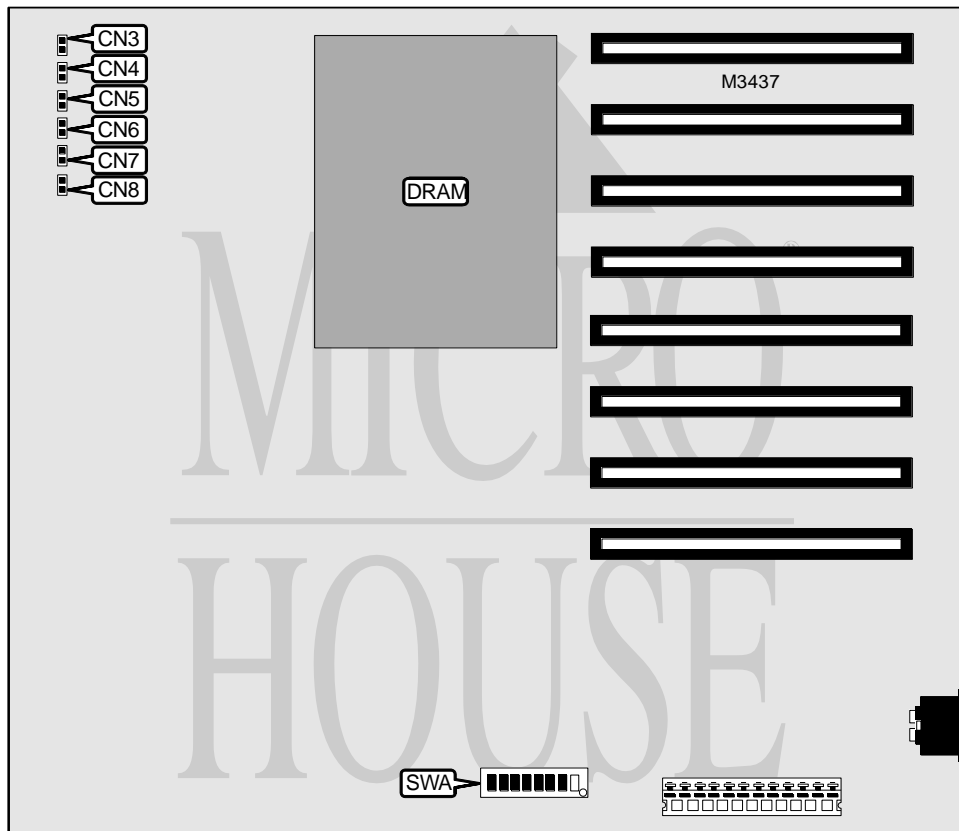

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED	CN3	Keylock	CN6
Reset switch	CN4	Turbo LED	CN7
Speaker	CN5	Turbo switch	CN8

Continued on next page. . .

JUKO ELECTRONICS INDUSTRIAL CO., LTD.  
 SUPER TURBO (VER. C1-B)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board memory wait state 0 wait states	J6	Open
On board memory wait state select 1 wait state	J6	Closed
Parity check enabled	SWA/1	Off
Parity check disabled	SWA/1	On
í Factory configured - do not alter	SWA/2	On

**DRAM CONFIGURATION**  
 Note: The memory chip sizes are unidentified.

DRAM SWITCH CONFIGURATION		
Size	SWA/3	SWA/4
None	On	On
512KB	Off	On
640KB	On	Off
1MB	Off	Off

CPU SPEED SELECTION	
Speed	CN8
4.77MHz	Open
12MHz	Closed
15MHz	Closed

MONITOR SELECTION		
Type	SWA/5	SWA/6
None	On	On
Color (40 x 35)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off

FLOPPY DRIVE SELECTION		
Drives installed	SWA/7	SWA/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off