


BOCA RESEARCH, INC.

IDE100

Q3/96

Data bus: 16-bit ISA
 Size: Half-length, half-height card
 Hard drive supported: Two IDE(AT) drives
 Floppy drives supported: Two 360KB, 720KB, 1.2MB, 1.44MB, or 2.88MB drives

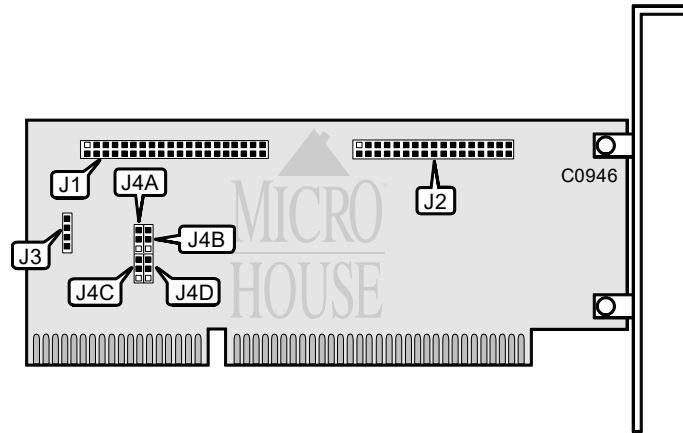

CONNECTIONS	
Function	Location
40-pin primary IDE(AT) connector	J1
34-pin cable connector - floppy drive	J2
4-pin connector - drive active LED	J3

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
í IDE(AT) interface is primary	J4A	Pins 1 & 2 closed
IDE(AT) interface is secondary	J4A	Pins 2 & 3 closed
í IDE(AT) IRQ 14 select	J4B	Pins 1 & 2 closed
IDE(AT) IRQ 15 select	J4B	Pins 2 & 3 closed
í IDE(AT) interface is enabled	J4C	Pins 1 & 2 closed
IDE(AT) interface is disabled	J4C	Pins 2 & 3 closed
í Floppy drive interface enabled	J4D	Pins 1 & 2 closed
Floppy drive interface disabled	J4D	Pins 2 & 3 closed