
LONGSHINE MICROSYSTEM, INC. LCS-6217

Data Bus

8-bit ISA

Card Size Hard Drives supported Half-length, full-height card Two ST-506/412(RLL) drives

Floppy drives supported None

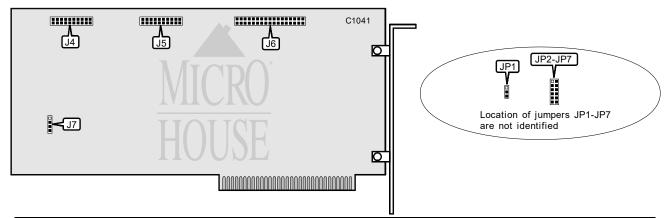

CONNECTIONS					
Function	Location	Function	Location		
20-pin data cable connector - drive 2	J4	4-pin power connector	J7		
20-pin data cable connector - drive 1	J5	34-pin control cable connector - hard	J6		
		drive			

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
í ROM BIOS address is C8000h	JP1	Pins 1 & 2 closed		
ROM BIOS address is E8000h	JP1	Pins 2 & 3 closed		

HARD DISK TYPE SELECTION FOR DRIVE 1						
Capacity	Head	Cylinder	JP2	JP3	JP4	
15MB	2	612	Open	Closed	Open	
30MB	4	612	Open	Open	Open	
30MB	4	615	Closed	Open	Open	
60MB	5	981	Open	Open	Closed	

HARD DISK TYPE SELECTION FOR DRIVE 2						
Capacity	Head	Cylinder	JP5	JP6	JP7	
15MB	2	612	Open	Closed	Open	
30MB	4	612	Open	Open	Open	
30MB	4	615	Closed	Open	Open	
60MB	5	981	Open	Open	Closed	