


# UNIDENTIFIED

## AL-6408

<b>Processor</b>	8088
<b>Processor Speed</b>	4/8/10MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	640KB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

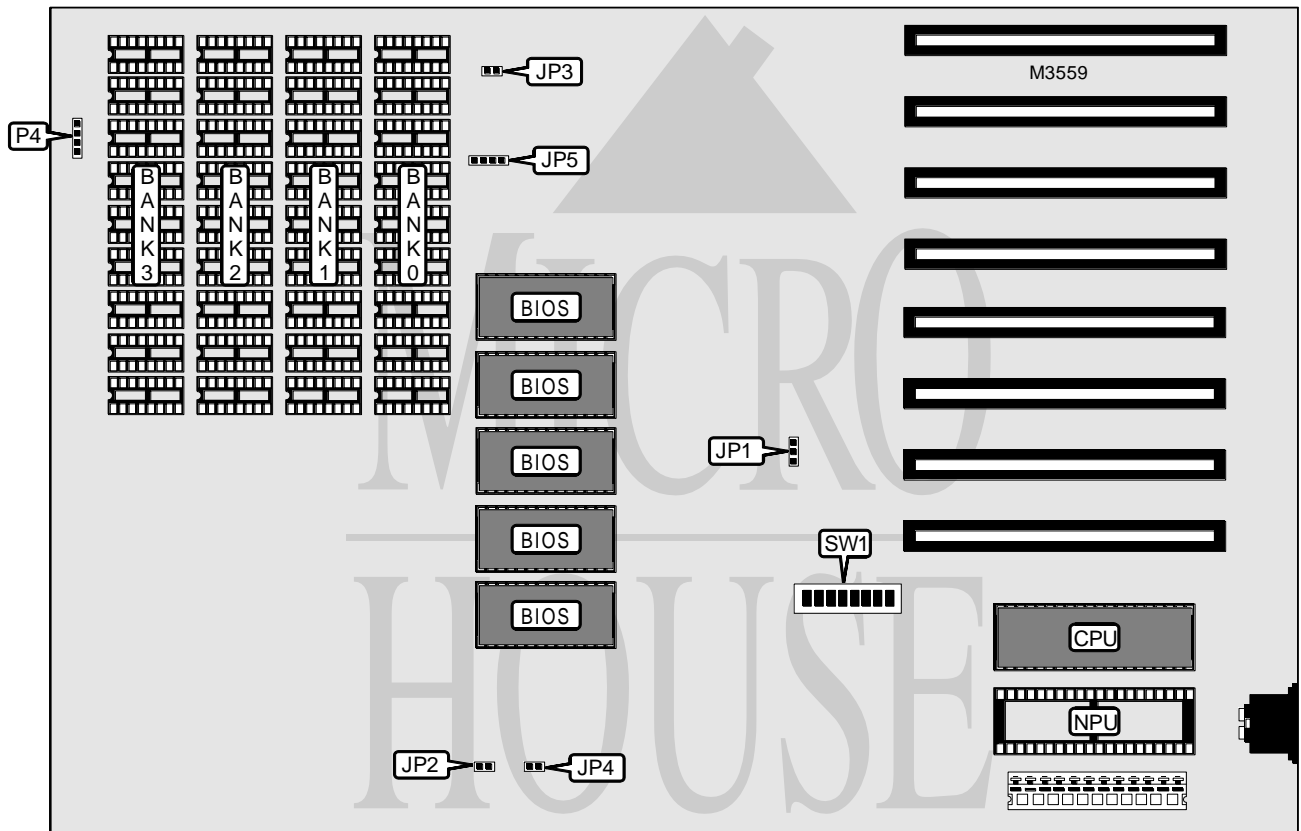

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	JP2	Speaker	P4
Power LED & keylock	JP5		

Continued on next page . . .

# UNIDENTIFIED

## AL-6408

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
CPU speed select through keyboard (CTRL, ALT, -)	JP1	Pins 1 & 2 closed
CPU speed select through hardware	JP1	Pins 2 & 3 closed
Turbo enabled	JP2	Closed
Turbo disabled	JP2	Open
Keyboard locked	JP4	Open
Keyboard unlocked	JP4	Closed
í Factory configured - do not alter	SW1/1	Off
NPU not installed	SW1/2	On
NPU installed	SW1/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(9) 4164	(9) 4164	(9) 4164	(9) 4164
256KB	(9) 41256	None	None	None
512KB	(9) 41256	(9) 41256	None	None
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM JUMPER CONFIGURATION	
Size	JP3
256KB	Open
256KB	Closed
512KB	Closed
640KB	Closed

DRAM SWITCH CONFIGURATION		
Size	SW1/3	SW1/4
128KB	Off	On
192KB	On	Off
256KB	Off	Off

MONITOR SELECTION		
Setting	SW1/5	SW1/6
None	On	On
Monochrome	Off	Off
Color 40 x 25	Off	On
Color 80 x 25	On	Off

FLOPPY DRIVE SELECTION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off