
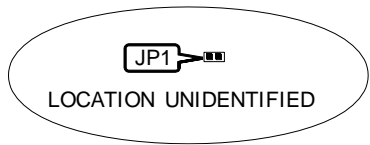


# UNIDENTIFIED WL286-6B

<b>Processor</b>	80286
<b>Processor Speed</b>	6/8/10/12MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	AMI/ERSO/Phoenix/Wisetek
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

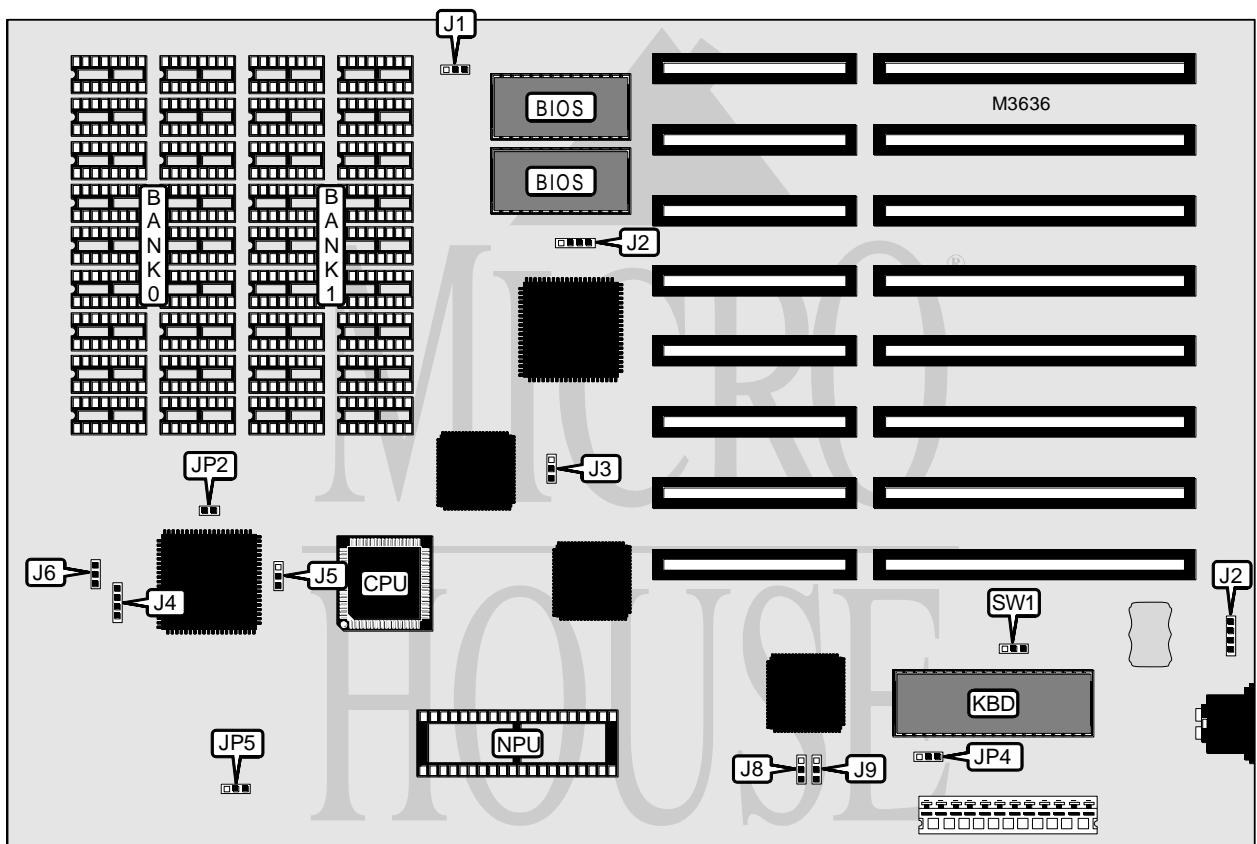

*Continued on next page...*

# UNIDENTIFIED

## WL286-6B

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery (position 1)	J2	Keylock	J6
External battery (position 2)	J2	Reset switch	JP1
Speaker	J4		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
BIOS type select 27256	J1	Pins 1 & 2 closed
BIOS type select 27128	J1	Pins 2 & 3 closed
PROM enabled	J3	Pins 1 & 2 closed
ROM enabled	J3	Pins 2 & 3 closed
82C206 select DMACLK	J5	Pins 1 & 2 closed
82C206 select SYSCLK	J5	Pins 2 & 3 closed
Wait state select 0 wait states	JP2	Closed
Wait state select 1 wait state	JP2	Open
Monitor type select color	SW1	Pins 1 & 2 closed
Monitor type select monochrome	SW1	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Base	Expanded	Bank 0	Bank 1
256KB	256KB	0	(18) 4164	(18) 4164
512KB	512KB	0	(18) 41256	None
640KB	640KB	0	(18) 41256	(18) 4164
1MB (A)	512KB	512KB	(18) 41256	(18) 41256
1MB (B)	640KB	384KB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION			
Size	J8	J9	JP5
256KB	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
512KB	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
640KB	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
1MB (A)	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
1MB (B)	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed

CPU SPEED SELECTION	
Speed	JP4
Select through software	Pins 1 & 2 closed
Select through hardware	Pins 2 & 3 closed