


LONGSHINE MICROSYSTEM, INC.

LCS-6217 RLL

Data Bus	8-bit ISA
Card Size	Half-length, full-height card
Hard Drives supported	Two ST-506/412(RLL) drives
Floppy drives supported	None

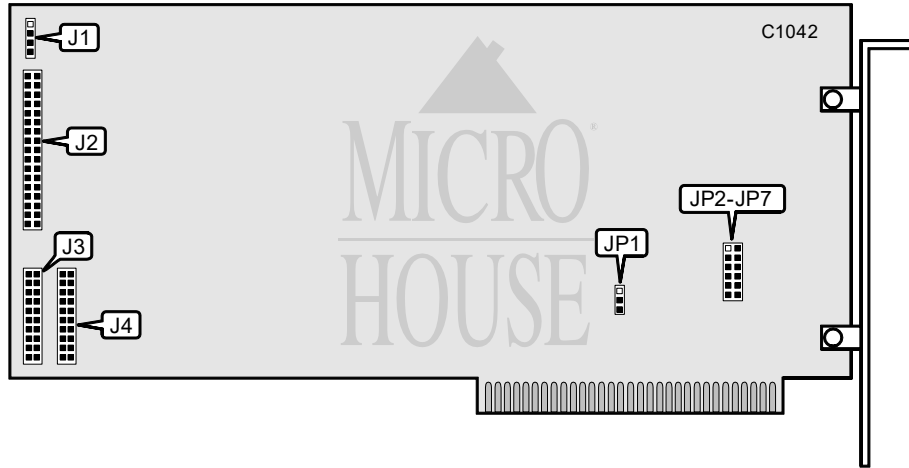

CONNECTIONS			
Function	Location	Function	Location
4-pin power connector	J1	20-pin data cable connector - drive 1/2	J3
34-pin control cable connector - hard drive	J2	20-pin data cable connector - drive 1/2	J4

Note: Primary and secondary drives are not identified.

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
i ROM BIOS address is C8000h	JP1	Pins 1 & 2 closed	
ROM BIOS address is E8000h	JP1	Pins 2 & 3 closed	

HARD DISK TYPE SELECTION FOR DRIVE 1					
Capacity	Head	Cylinder	JP2	JP3	JP4
15MB	2	612	Open	Closed	Open
30MB	4	612	Open	Open	Open
30MB	4	615	Closed	Open	Open
60MB	5	981	Open	Open	Closed

HARD DISK TYPE SELECTION FOR DRIVE 2					
Capacity	Head	Cylinder	JP5	JP6	JP7
15MB	2	612	Open	Closed	Open
30MB	4	612	Open	Open	Open
30MB	4	615	Closed	Open	Open
60MB	5	981	Open	Open	Closed