


# TANDY/RADIO SHACK

## 2100

<b>Processor</b>	80486SX
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	400mm x 394mm
<b>I/O Options</b>	None
<b>NPU Options</b>	None

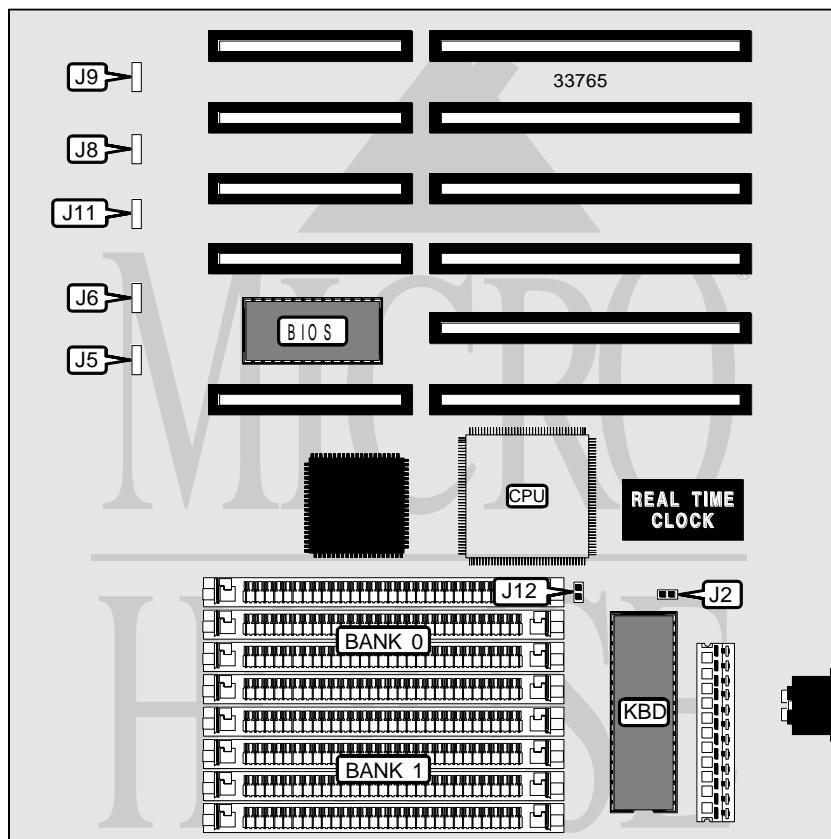

CONNECTIONS			
Purpose	Location	Purpose	Location
Front panel connector	J5	Front panel connector	J9
Front panel connector	J6	Front panel connector	J11
Front panel connector	J8		

*Continued on next page...*

# TANDY/RADIO SHACK

## 2100

*... continued from previous page*

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select monochrome/EGA/VGA	J2	Open
Monitor type select color	J2	Closed
í Factory configured - do not alter	J5	Unidentified
í Factory configured - do not alter	J6	Unidentified
í Factory configured - do not alter	J8	Unidentified
í Factory configured - do not alter	J9	Unidentified
í Factory configured - do not alter	J11	
í CMOS memory normal operation	J12	Open
CMOS memory clear	J12	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 256K x 9	(4) 1M x 9
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 256K x 9	(4) 4M x 9
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9