


# UNIDENTIFIED 10MHZ TURBO XT

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/10MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Juko
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	8087

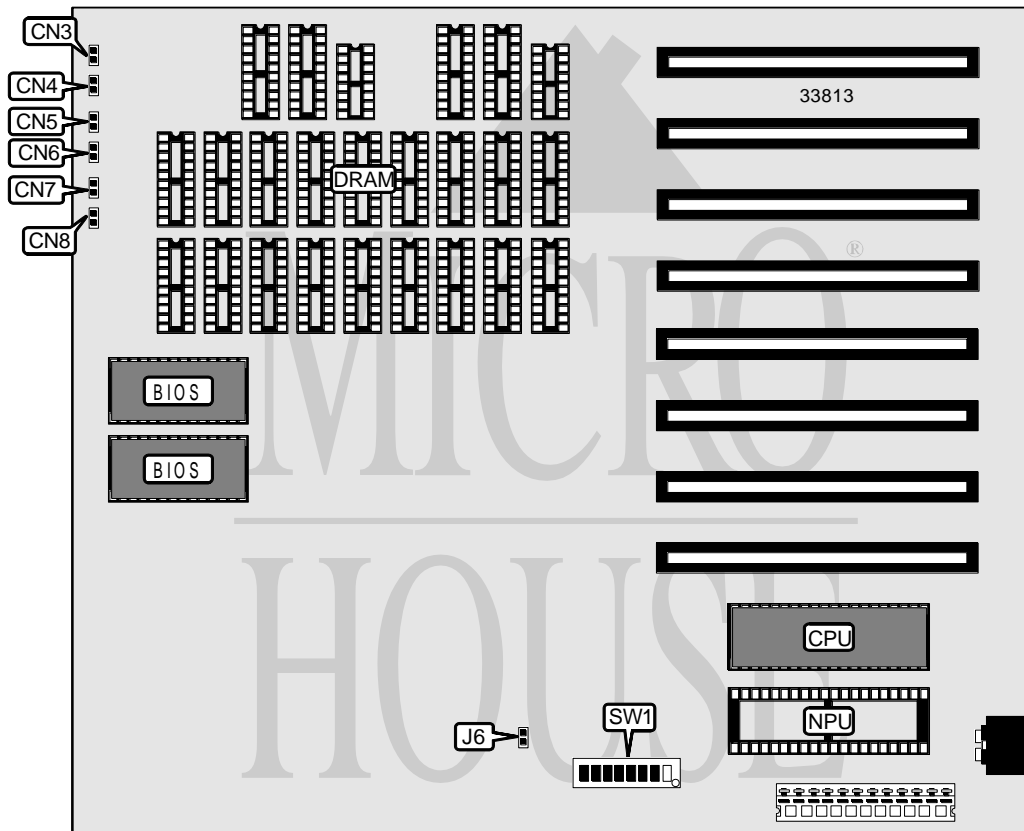

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED	CN3	Keylock	CN6
Reset switch	CN4	Turbo LED	CN7
Speaker	CN5	Turbo switch	CN8

Continued on next page...

# UNIDENTIFIED 10MHZ TURBO XT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Wait state select 0 wait states	J6	Open
Wait state select 1 wait state	J6	Closed
Parity check disabled	SW1/1	On
Parity check enabled	SW1/1	Off
í Factory configured - do not alter	SW1/2	On

DRAM CONFIGURATION	
	Size
	512KB
	640KB
	1MB
Note: The number of banks and chip sizes are unidentified.	

DRAM JUMPER CONFIGURATION		
Size	SW1/3	SW1/4
None	On	On
512KB	Off	On
640KB	On	Off
1MB	Off	Off

FLOPPY DRIVE SELECTION		
Drives installed	SW1/7	SW1/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off

MONITOR SELECTION		
Type	SW1/5	SW1/6
None	On	On
Color (40 x 25)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off