


STB SYSTEMS, INC. GRAPHIX PLUS II

Card Type	Multi-I/O
Video Processor	6845
Maximum Onboard Memory	32KB DRAM
I/O Options	SASI/SCSI connector, clock/calendar, light pen port, parallel port, video port (3), RF modulator connector
Data Bus	8-bit ISA
Video Types Supported	Monochrome/CGA
Highest Resolution Supported	640 x 350
Hard Drives Supported	Up to 7 SASI or SCSI devices

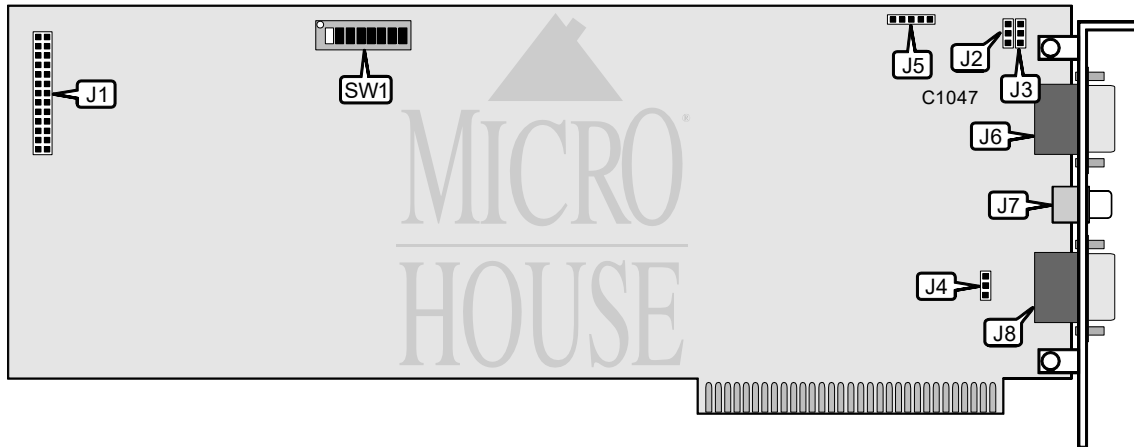

CONNECTIONS			
Function	Label	Function	Label
Parallel or SASI/SCSI port	J1	Light pen port	J5
Test connector	J2	CGA video out	J6
1.5V AA battery connector	J3	Composite video out	J7
RF modulator connector	J4	Monochrome video out	J8

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í J1 is a parallel port	SW 1/1	Off
J1 is a SASI/SCSI port	SW 1/1	On
í Automatically detect the adapter type being used by software	SW 1/4	On
Send all video signals to the monochrome monitor	SW 1/4	Off
í Monochrome video disabled when monochrome monitor is off or not connected	SW 1/5	On
Monochrome video enabled even when no monitor is available	SW 1/5	Off
í Red signal sent to monochrome display	SW 1/6	On
Red not signal sent to monochrome display	SW 1/6	Off
í Green signal sent to monochrome display	SW 1/7	On
Green not signal sent to monochrome display	SW 1/7	Off
í Blue signal sent to monochrome display	SW 1/8	On
Blue not signal sent to monochrome display	SW 1/8	Off

Continued on next page. . .

STB SYSTEMS, INC.
GRAPHIX PLUS II

. . . continued from previous page

MONITOR TYPE SELECTION		
Setting	SW1/2	SW1/3
í Card acts as both monochrome and color displays	Off	Off
Card acts as monochrome display only	Off	On
Card acts as color display only	On	Off
Card behaves like Graphix Plus card in monochrome graphics mode	On	On