STB SYSTEMS, INC. GRAPHIX PLUS

Card Type Multi-I/O
Video Processor Unidentified
Maximum Onboard Memory
I/O Options SASI connect

SASI connector, clock/calendar, light pen port, parallel port, video port (3),

RF modulator connector


Data Bus 8-bit ISA

Video Types Supported Monochrome/CGA

Highest Resolution 640 x 350

Supported

Hard Drives Supported Up to 7 SASI or SCSI devices

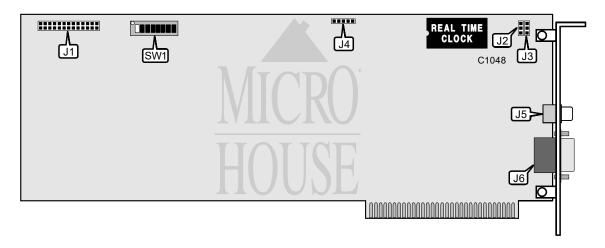

CONNECTIONS					
Function	Label	Function	Label		
Parallel or SASI port	J1	Light pen port	J4		
Unidentified	J2	Composite video out	J5		
1.5V AA battery connector	J3	CGA/Monochrome video out	J6		

USER CONFIGURABLE SETTINGS					
Setting	Label	Position			
í J1 is a parallel port	SW1/1	Off			
J1 is a SASI port	SW1/1	On			
í Card acts as color display, parallel port address set to 278h	SW1/2	On			
Card acts as monochrome display, parallel port address set to 3BCh	SW1/2	Off			
í Blue signal sent to monochrome display	SW1/6	On			
Blue not signal sent to monochrome display	SW1/6	Off			
í Green signal sent to monochrome display	SW1/7	On			
Green not signal sent to monochrome display	SW1/7	Off			
í Red signal sent to monochrome display	SW1/8	On			
Red not signal sent to monochrome display	SW1/8	Off			

MONITOR TYPE						
Setting	SW1/3	SW1/4	SW1/5			
í Color monitor	On	On	Off			
Monochrome monitor	Off	Off	On			