


COMPAQ COMPUTER CORPORATION

PRESARIO 9500

Processor	Pentium
Processor Speed	75/90/100/120/133/150/166/200MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	136MB
Maximum Video Memory	2MB
Cache	Unidentified
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Unidentified
NPU Options	None

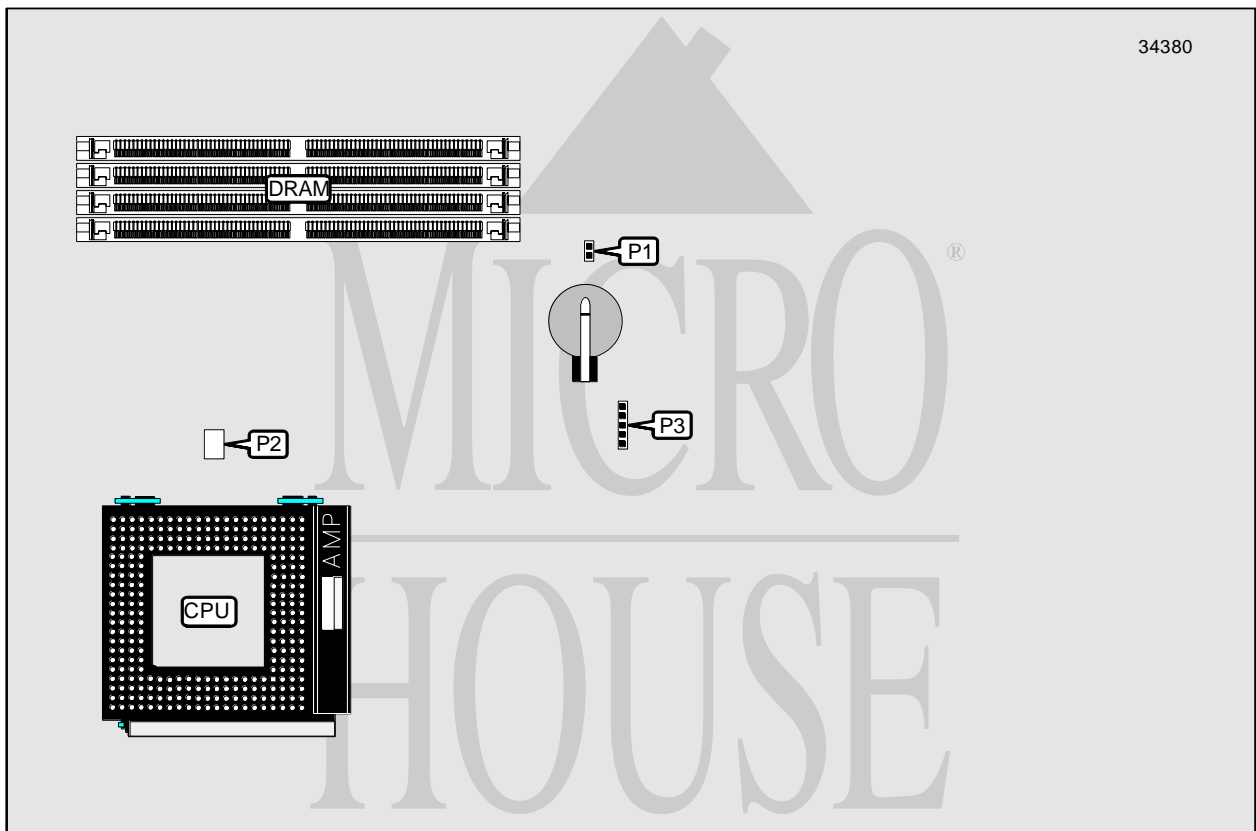

THE LOCATION OF MOST JUMPERS, SWITCHES AND I/O CONNECTORS ARE UNIDENTIFIED

CONNECTIONS

Note: The location and types of all other I/O options are unidentified.

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PRESARIO 9500

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	P1	Closed
CMOS memory clear	P1	Open

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	8MB	None	None
16MB	8MB	(2) 1M x 36	None
24MB	8MB	(2) 2M x 36	None
24MB	8MB	(2) 1M x 36	(2) 1M x 36
32MB	8MB	(2) 2M x 36	(2) 1M x 36
40MB	8MB	(2) 4M x 36	None
40MB	8MB	(2) 2M x 36	(2) 2M x 36
48MB	8MB	(2) 4M x 36	(2) 1M x 36
56MB	8MB	(2) 4M x 36	(2) 2M x 36
72MB	8MB	(2) 8M x 36	None
72MB	8MB	(2) 4M x 36	(2) 4M x 36
104MB	8MB	(2) 8M x 36	None
136MB	8MB	(2) 8M x 36	(2) 8M x 36

Note: Bank 0 is factory installed and is not configurable. The location of banks 1 & 2 are unidentified.

CACHE CONFIGURATION
Note: The size & location of the cache is unidentified.

VIDEO MEMORY CONFIGURATION
Note: Board is factory installed with 1MB. A 1MB upgrade is available. The location is unidentified.

CPU SPEED SELECTION				
CPU speed	Clock speed	Multiplier	P2	P3
75MHz	50MHz	1.5x	A1 & A2, B1 & B2	1 & 2
90MHz	60MHz	1.5x	A1 & A2, B1 & B2	3 & 4
100MHz	66MHz	1.5x	A1 & A2, B1 & B2	4 & 5
120MHz	60MHz	2x	A2 & A3, B1 & B2	3 & 4
133MHz	66MHz	2x	A2 & A3, B1 & B2	4 & 5
150MHz	60MHz	2.5x	A2 & A3, B2 & B3	3 & 4
166MHz	66MHz	2.5x	A2 & A3, B2 & B3	4 & 5
200MHz	66MHz	3x	A1 & A2, B2 & B3	4 & 5

Note: Pins designated should be in the closed position.