


# HEDAKA HED-821A

**Data Bus** 8/16 bit ISA  
**Card Size** Full height, three-quarters length  
**Hard Drives Supported** Two ST506/412(MFM) devices  
**Floppy Drives Supported** Two 360KB, 720KB, 1.2MB, or 1.44MB drives

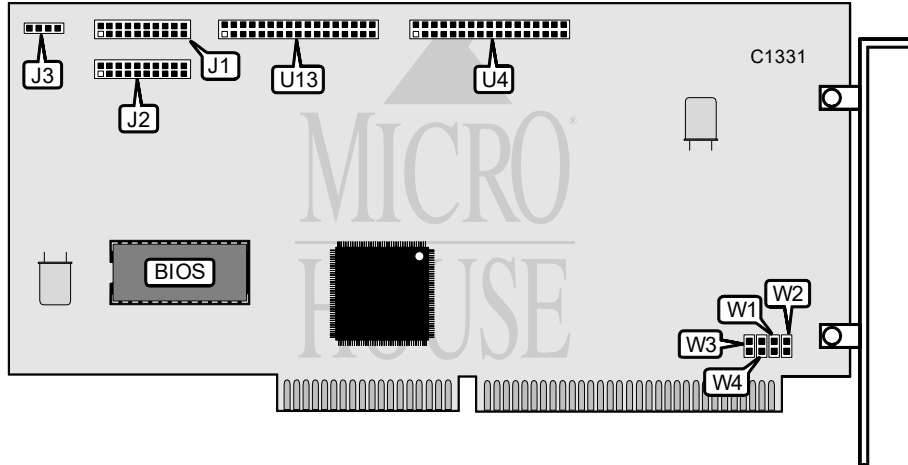

CONNECTIONS			
Function	Label	Function	Label
20-pin data cable connector - drive 0	J1	34-pin control cable connector - hard drive	U4
20-pin data cable connector - drive 1	J2	34-pin hard drive control cable	U13
4-pin drive active LED	J3		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
Card uses primary hard drive address	W2	Open
Card uses secondary hard drive address	W2	Closed
Card uses primary floppy address	W3	Open
Card uses secondary floppy address	W3	Closed

FLOPPY CONTROLLER CONFIGURATION		
Setting	W1	W4
Enabled	Closed	Closed
Disabled	Open	Open