


DATA TECHNOLOGY CORPORATION DTC2277 (TEKRAM VER. 2)

Chipset	Tekram
Maximum Onboard Memory	Unidentified
Data Bus	32-bit VESA local bus
Card Size	Full height, full length
Hard Drives Supported	Four IDE-AT devices
Floppy Drives Supported	Unidentified

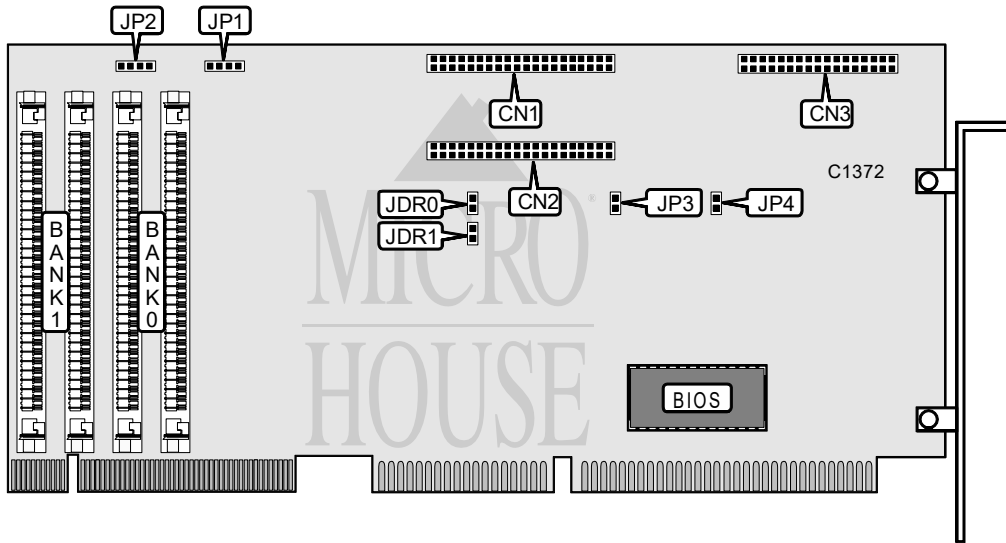

CONNECTIONS			
Function	Label	Function	Label
40-pin primary IDE(AT) connector	CN1	4-pin drive active LED	JP1
40-pin secondary IDE(AT) connector	CN2	4-pin connector to speaker	JP2
34-pin cable connector - floppy drive	CN3		

USER CONFIGURABLE SETTINGS			
Setting	Label	Position	
í Primary channel noise filter mode 1 enabled	JDR0	Open	
Primary channel noise filter mode 2 enabled	JDR0	Closed	
í Secondary channel noise filter mode 1 enabled	JDR1	Open	
Secondary channel noise filter mode 2 enabled	JDR1	Closed	
í Factory configured - do not alter	JP3	Unidentified	
í Factory configured - do not alter	JP4	Unidentified	
Note: The exact implementation of the noise filter modes are unidentified. However, mode 1 is compatible with most hard drives.			

DRAM CONFIGURATION
The configuration of the memory is unidentified.