


# ABIT COMPUTER CORPORATION

## F U 3 T

<b>Processor</b>	C&T386DX/AM386DX/80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	32MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	32/64/256KB
<b>BIOS</b>	AMI/C & T
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387DX/3167

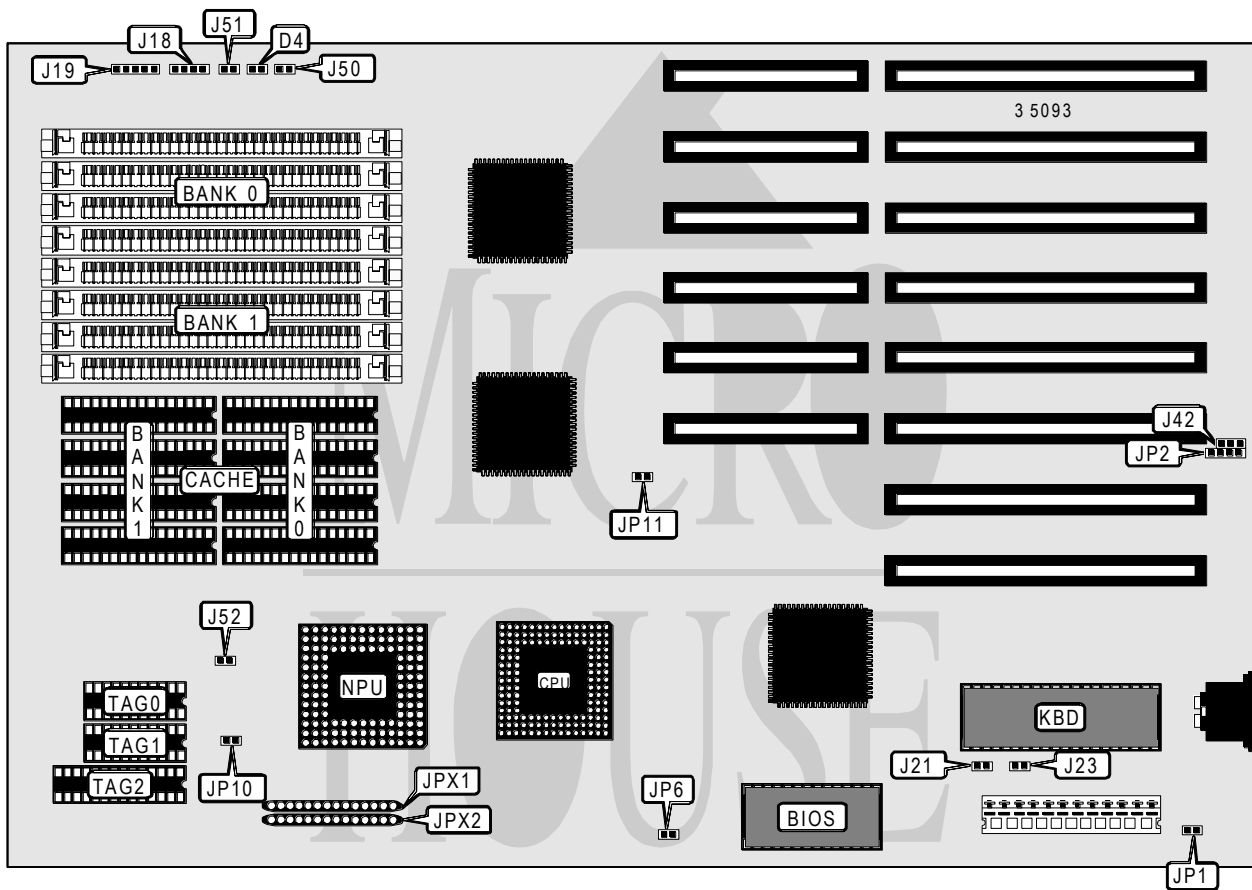

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo LED	D4	Turbo switch	J50
Speaker	J18	Reset switch	J51
Power LED & keylock	J19	External battery	JP2

Continued on next page . . .

# ABIT COMPUTER CORPORATION

## F U 3 T

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Unidentified
Jumper information unavailable	JP6	Unidentified
NPU clock mode select synchronous	JP10	Open
NPU clock mode select asynchronous	JP10	Closed
Factory configured - do not alter (33MHz CPU)	JP11	Closed
Factory configured - do not alter (40MHz CPU)	JP11	Open
í Factory configured - do not alter	J21	Open
Monitor type select monochrome	J23	Open
Monitor type select CGA/EGA/VGA	J23	Closed
í CMOS memory normal operation	J42	Pins 2 & 3 closed
CMOS memory clear	J42	Pins 1 & 2 closed
Turbo disabled	J50	Closed
Turbo enabled	J50	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION				
Size	Bank 0	Bank 1	TAG 0 & 1	TAG 2
32KB	(4) 8K x 8	None	None	(1) 8K x 8
64KB	(4) 8K x 8	(4) 8K x 8	(2) 16K x 4	None
256KB	(4) 32K x 8	(4) 32K x 8	(2) 64K x 4	None

CACHE JUMPER CONFIGURATION			
Size	J52	JPX1	JPX2
32KB	Pins 1 & 2 closed	Pins 1 - 8 installed	Pins 1 - 8 installed
64KB	Pins 1 & 2 closed	Pins 3 - 10 installed	Pins 3 - 10 installed
256KB	Pins 2 & 3 closed	Pins 7 - 14 installed	Pins 7 - 14 installed