
## DATA TECHNOLOGY CORPORATION DTC2277 (ATRONICS VER.)

**Chipset** Atronics ATI-2020 **Maximum Onboard Memory** Unidentified

Data Bus32-bit VESA local busCard SizeFull height, full lengthHard Drives SupportedFour IDE-AT devices

Floppy Drives Supported Unidentified

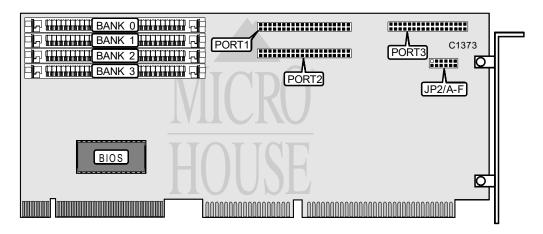

	CONNE	CTIONS	
Function	Label	Function	Label
40-pin primary IDE(AT) connector	PORT1	34-pin cable connector - floppy drive	PORT3
40-pin secondary IDE(AT) connector	PORT2		

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Factory configured - do not alter	JP2/D	Open
í Factory configured - do not alter	JP2/E	Closed
í Factory configured - do not alter	JP2/F	Closed

BIOS ADDRESS SELECTION					
Setting	JP2/A	JP2/B	JP2/C		
C8000h	On	Off	Off		
CC000h	Off	On	Off		
D0000h	On	On	Off		
D4000h	Off	Off	On		
D8000h	On	Off	On		
í DC000h	On	On	On		
Disabled	Off	Off	Off		

I	DRAM CONFIGURATION	
	The configuration of the memory is unidentified.	