


JAMECO ELECTRONIC COMPONENTS

JE 1066A

Card Type	Hard drive controller card
Hard Drives supported	Two IDE (AT) drives
Floppy drives supported	Two 360KB, 720KB, 1.2MB, or 1.44MB drives
Data Bus	16-bit ISA
Card Size	Half-length, half-height card

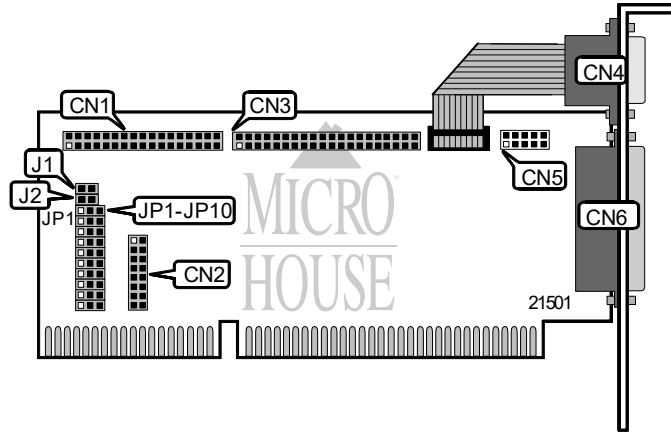

CONNECTIONS			
Function	Location	Function	Location
34-pin cable connector - floppy drive	CN1	10-pin serial port 2 - internal	CN5
16-pin game port	CN2	25-pin parallel port - external	CN6
40-pin IDE(AT) connector	CN3	4-pin connector - drive active LED	J2
9-pin serial port 1 - external	CN4		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
IOCHRDY signal	J1	Unidentified	
Serial port 2 COM 2(2F8h) select	JP1	Pins 1 & 2 closed	
Serial port 2 COM 4(2E8h) select	JP1	Pins 2 & 3 closed	
Serial port 2 enabled	JP2	Pins 1 & 2 closed	
Serial port 2 disabled	JP2	Pins 2 & 3 closed	
Game port enabled	JP3	Pins 1 & 2 closed	
Game port disabled	JP3	Pins 2 & 3 closed	
Serial port 1 COM 1(3F8h) select	JP4	Pins 1 & 2 closed	
Serial port 1 COM 3(3E8h) select	JP4	Pins 2 & 3 closed	
Parallel port is LPT2(378h)	JP5	Pins 1 & 2 closed	
Parallel port is LPT3(278h)	JP5	Pins 2 & 3 closed	
Serial port 1 enabled	JP6	Pins 1 & 2 closed	
Serial port 1 disabled	JP6	Pins 2 & 3 closed	
Floppy drive interface enabled	JP7	Pins 1 & 2 closed	
Floppy drive interface disabled	JP7	Pins 2 & 3 closed	
IDE(AT) interface is primary	JP8	Pins 2 & 3 closed	
IDE(AT) interface is secondary	JP8	Pins 1 & 2 closed	
IDE(AT) interface enabled	JP9	Pins 1 & 2 closed	
IDE(AT) interface disabled	JP9	Pins 2 & 3 closed	
Parallel port enabled	JP10	Pins 1 & 2 closed	
Parallel port disabled	JP10	Pins 2 & 3 closed	