


DATA TECHNOLOGY CORPORATION

DTC-2130S/D (900505-89B)

Card Type
 Hard Drives supported
 Floppy drives supported
 Data Bus
 Card Size

Hard drive controller card
 Two IDE (AT) drives
 None
 32-bit PCI
 Half-length, half-height card

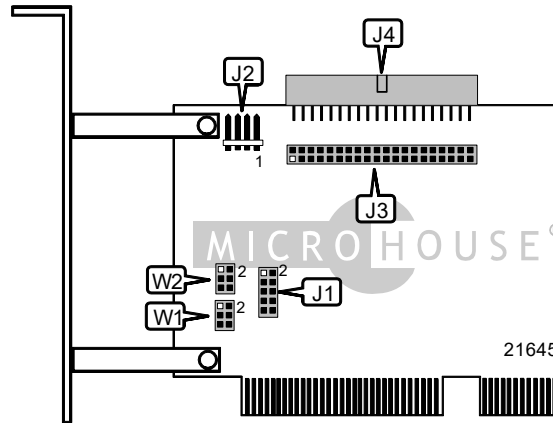

CONNECTIONS			
Function	Location	Function	Location
4-pin connector - drive active LED	J2	40-pin primary IDE(AT) connector	J4
40-pin secondary IDE(AT) connector	J3		

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	J1	Unidentified	

PRIMARY IDE INTERRUPT SELECTION			
IRQ 14	Label	Position	
INT A	W1	Pins 1 & 3 closed	
INT B	W1	Pins 2 & 4 closed	
INT C	W1	Pins 3 & 5 closed	
INT D	W1	Pins 4 & 6 closed	

SECONDARY IDE INTERRUPT SELECTION			
IRQ 15	Label	Position	
INT A	W2	Pins 1 & 3 closed	
INT B	W2	Pins 2 & 4 closed	
INT C	W2	Pins 3 & 5 closed	
INT D	W2	Pins 4 & 6 closed	