


DATA TECHNOLOGY CORPORATION

DTC2290 (400395-89A1)

Card Type	Hard drive controller card
Hard Drives supported	Four IDE (AT) drives
Floppy drives supported	Two 360KB, 720KB, 1.2MB, or 1.44MB drives
Data Bus	16-bit ISA
Card Size	Three-quarter length, full-height card

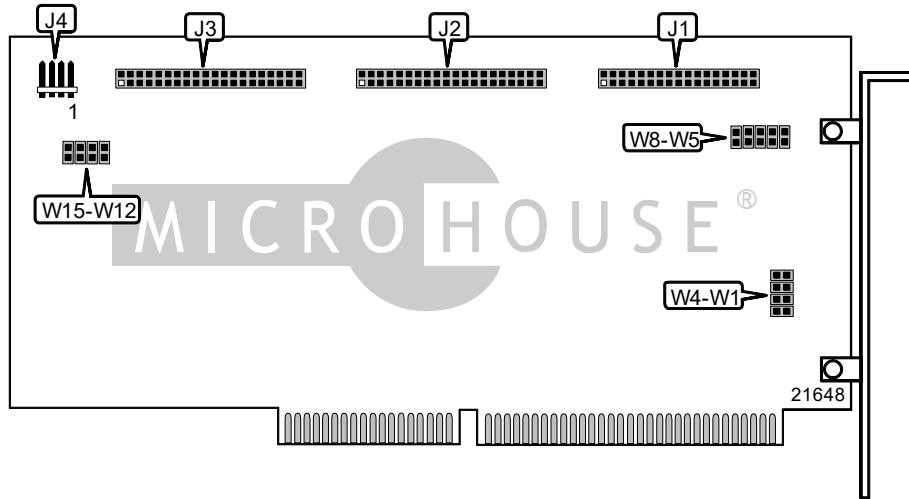

CONNECTIONS			
Function	Location	Function	Location
34-pin cable connector - floppy drive	J1	40-pin secondary IDE(AT) connector	J3
40-pin primary IDE(AT) connector	J2	4-pin connector - drive active LED	J4

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í BIOS enabled	W3	Closed	
BIOS disabled	W3	Open	
í Floppy drive interface AT cable	W4	Open	
Floppy drive interface IBM cable	W4	Closed	

PORT 1 DRIVE 0 HEAD MAPPING SETTINGS			
Setting		W5	
64- head mapping disabled		Open	
64- head mapping enabled		Closed	

PORT 1 DRIVE 1 HEAD MAPPING SETTINGS			
Setting		W6	
64- head mapping disabled		Open	
64- head mapping enabled		Closed	

PORT 2 DRIVE 0 HEAD MAPPING SETTINGS			
Setting		W7	
64- head mapping disabled		Open	
64- head mapping enabled		Closed	

Continued on next page . . .

DATA TECHNOLOGY CORPORATION
DTC2290 (400395-89A1)

. . . continued from previous page

PORT 2 DRIVE 1 HEAD MAPPING SETTINGS	
Setting	W8
64- head mapping disabled	Open
64- head mapping enabled	Closed

BIOS ADDRESS SELECTION		
Address	W1	W2
C800:0000h	Open	Open
D000:0000h	Open	Closed
D400:0000h	Closed	Closed
D800:0000h	Closed	Open