


# DATA TECHNOLOGY CORPORATION

## DTC-3520A (400592-89A)

Card Type	Hard drive controller card
Hard Drives supported	Up to 7 SCSI-2 devices
Floppy drives supported	None
Data Bus	16-bit ISA
Card Size	Half-length, half-height card

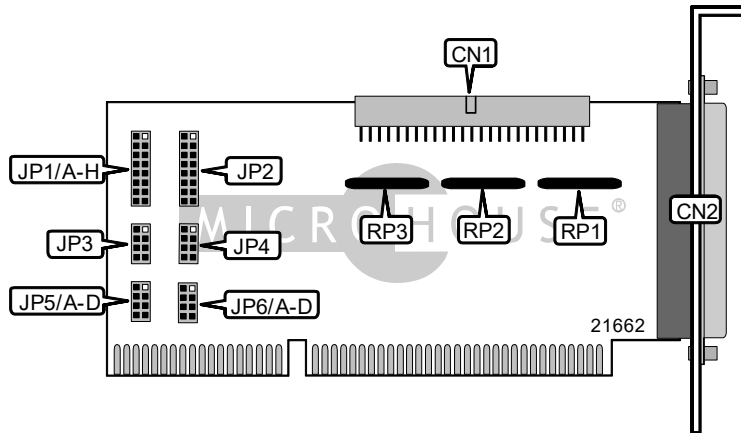

CONNECTIONS			
Function	Location	Function	Location
50-pin SCSI connector - internal	CN1	25-pin SCSI connector - external	CN2

USER CONFIGURABLE SETTINGS			
Function	Label	Position	
í Factory configured - do not alter	JP1/A	Unidentified	
í Parity bit enable	JP1/B	Closed	
Parity bit disable	JP1/B	Open	
í Factory configured - do not alter	JP1/C	Unidentified	
í Factory configured - do not alter	JP1/F	Unidentified	
í Factory configured - do not alter	JP1/G	Unidentified	
í Factory configured - do not alter	JP1/H	Unidentified	
í Factory configured - do not alter	JP2	Unidentified	
í Factory configured - do not alter	JP3	Unidentified	
í Factory configured - do not alter	JP4	Unidentified	
í BIOS enabled	JP6/A	Closed	
BIOS disabled	JP6/A	Open	
í Port address 340h	JP6/D	Closed	
Port address 140h	JP6/D	Open	

BIOS ADDRESS SELECTION		
Address	JP6/B	JP6/C
C800h	Open	Open
CC00h	Closed	Open
D800h	Open	Closed
DC00h	Closed	Closed

Continued on next page . . .

DATA TECHNOLOGY CORPORATION  
DTC-3520A (400592-89A)

. . . continued from previous page

INTERRUPT SELECTION						
IRQ	JP1/D	JP1/E	JP5/A	JP5/B	JP5/C	JP5/D
IRQ9	Closed	Closed	Open	Open	Open	Closed
IRQ10	Closed	Open	Open	Open	Closed	Open
IRQ11	Open	Closed	Open	Closed	Open	Open
IRQ12	Open	Open	Closed	Open	Open	Open