


# UNKNOWN

## 3295UMV-A VER 1

Q2/96

Data bus: 32-bit, VL-Bus  
 Size: Three quarter-length, half-height card  
 Hard drive supported: One IDE (AT) interface drive  
 Floppy drives supported: 360KB, 720KB, 1.2MB, or 1.44MB drives

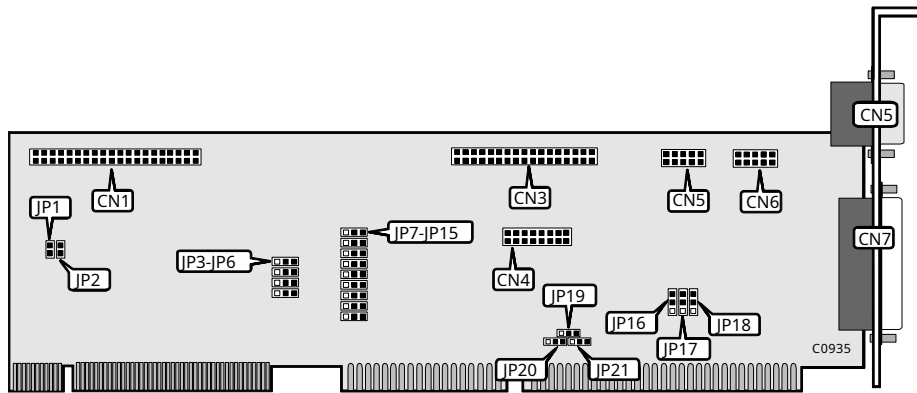

CONNECTIONS	
Function	Location
40-pin primary IDE(AT) interface	CN1
34-pin control cable connector - floppy drive	CN3
16-pin Game port	CN4
9-pin serial port 1 - external, 10-pin serial port 1 - internal	CN5
10-pin serial port 2 - internal	CN6
25-pin parallel port	CN7
2-pin drive active LED for primary IDE	JP1
2-pin drive active LED for secondary IDE	JP2

CPU CLOCK CONFIGURATION		
CPU Clock	JP3	JP4
40-50 MHz	open	open
Below 20 MHz or Enhanced IDE support	open	closed
20-33 MHz	closed	open
Under 40 MHz or Non-ATA support	closed	closed

Continued on next page . . .

UNITED MICROELECTRONICS CORPORATION  
FSIOL-UC2.1C

...continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Location	Setting
<input type="checkbox"/> Primary IDE interface enabled	JP5	pins 1 & 2 closed
<input type="checkbox"/> Primary IDE interface disabled	JP5	pins 2 & 3 closed
<input type="checkbox"/> Secondary IDE interface enabled	JP6	pins 1 & 2 closed
<input type="checkbox"/> Secondary IDE interface disabled	JP6	pins 2 & 3 closed
<input type="checkbox"/> Floppy drive interface enabled	JP9	pins 1 & 2 closed
<input type="checkbox"/> Floppy drive interface disabled	JP9	pins 2 & 3 closed
<input type="checkbox"/> Parallel port is LPT2	JP14	pins 1 & 2 closed
<input type="checkbox"/> Parallel port is LPT3	JP14	pins 2 & 3 closed
<input type="checkbox"/> Game port enabled	JP15	pins 1 & 2 closed
<input type="checkbox"/> Game port disabled	JP15	pins 2 & 3 closed
<input type="checkbox"/> Factory configured - do not alter	JP16	N/A
<input type="checkbox"/> Factory configured - do not alter	JP17	N/A
<input type="checkbox"/> Factory configured - do not alter	JP18	N/A
<input type="checkbox"/> Factory configured - do not alter	JP19	N/A
<input type="checkbox"/> Factory configured - do not alter	JP20	N/A
<input type="checkbox"/> Factory configured - do not alter	JP21	N/A

PARALLEL PORT MODE CONFIGURATION		
MODE	JP7	JP8
<input type="checkbox"/> Standard printer	pins 1 & 2 closed	pins 1 & 3 closed
<input type="checkbox"/> ECP / EPP	N/A	N/A
<input type="checkbox"/> Disabled	pins 1 & 3 closed	pins 1 & 3 closed

SERIAL PORT 1 CONFIGURATION		
COM	JP10	JP11
<input type="checkbox"/> COM1	pins 1 & 2 closed	pins 1 & 2 closed
<input type="checkbox"/> COM3	pins 1 & 2 closed	pins 1 & 3 closed
<input type="checkbox"/> Disabled	pins 1 & 3 closed	N/A

SERIAL PORT 2 CONFIGURATION		
COM	JP12	JP13
<input type="checkbox"/> COM2	pins 1 & 2 closed	pins 1 & 2 closed
<input type="checkbox"/> COM4	pins 1 & 2 closed	pins 1 & 3 closed
<input type="checkbox"/> Disabled	pins 1 & 3 closed	N/A