


# D-LINK DE-300TP for PS/2


**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit MCA  
**Topology** Linear Bus  
**Wiring Type** Shielded/Unshielded twisted pair  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

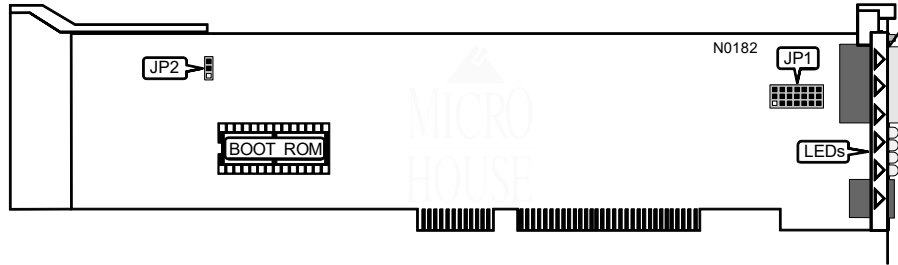

CABLE TYPE	
Type	JP1/Jumpers 1-7
Shielded/Unshielded twisted pair	Pins 1-2 Closed
AUI transceiver via DB-15 port	Pins 2-3 Closed

NIC ID	
ID Number	JP2
IOFCh	Pins 2-3 Closed
OFCdh	Pins 1-2 Closed

Note: The IBM configuration program will automatically know which configuration file to use. If two cards are present, (i.e.-connecting two networks together) set JP2 on each card to a different ID.



DIAGNOSTIC LED(S)		
LED	Status	Condition
1	On	Power is on
1	Blinking	Data is being transmitted
2	On	Network connection is good
2	Blinking	Data is being received
3	On	Collision detected on the network
3	Off	No collisions detected on the network
4	Off	Normal operation
4	On	Transmission interrupted due to abnormally long data stream output