


D-LINK  
DE-300 for PS/2

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit MCA  
**Topology** Linear Bus  
**Wiring Type** RG--58A/U 50ohm coaxial  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

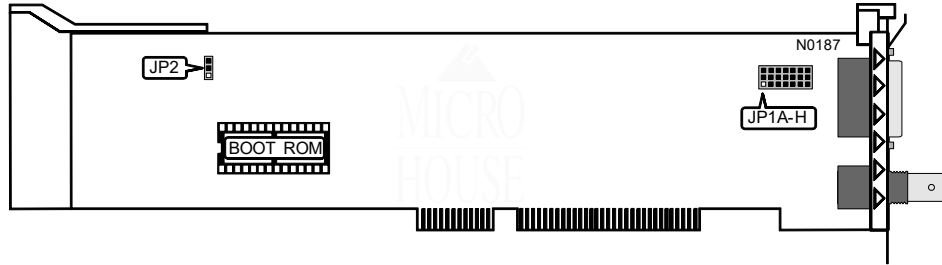

CABLE TYPE	
Type	JP1/Jumpers 1-7
iRG-58A/U 50ohm coaxial	Pins 2 & 3 Closed
AUI transceiver via DB-15 port	Pins 1 & 2 Closed

CONFIGURATION ID		
ID Num er	Jumpe	Positio
iOFCh	JP2	Pins 2 & 3 Closed
OFCh	JP2	Pins 1 & 2 Closed

Note: The IBM configuration program will automatically know which configuration file to use. If two cards are present in the same system, (e.g.-two cards in the same server) set JP2 on each card to a different ID.