


LONGSHINE MICROSYSTEM, INC.
LCS-8634T (REV. A)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Star
Wiring Type Shielded/Unshielded twisted pair
 AUI transceiver via DB-15 port
Boot ROM Available

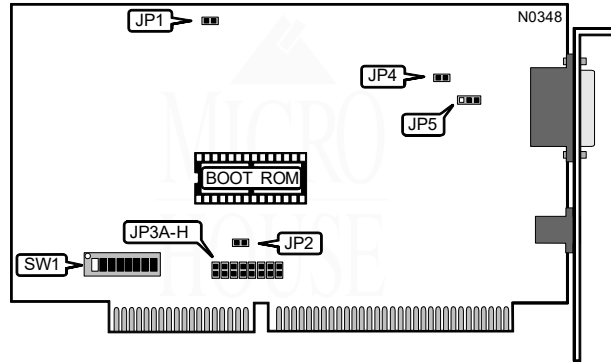

CABLE TYPE	
Type	JP1
iShielded/Unshielded twisted pair	Closed
AUI transceiver via DB-15 port	Open

COMPATABILITY MODE	
Setting	JP2
iDisabled	Open
Enabled	Closed

Note: Some systems use non-standard timing. If your system does not work with this card, set this option to enabled (closed).

INTERUPT REQUEST								
IRQ	JP3A	JP3B	JP3C	JP3D	JP3E	JP3F	JP3G	JP3H
i3	Open	Open	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Open	Open	Closed	Open
5	Open	Open	Open	Open	Open	Closed	Open	Open
9	Open	Open	Open	Open	Closed	Open	Open	Open
10	Open	Open	Open	Closed	Open	Open	Open	Open
11	Open	Open	Closed	Open	Open	Open	Open	Open
12	Open	Closed	Open	Open	Open	Open	Open	Open
15	Closed	Open	Open	Open	Open	Open	Open	Open

Continued on next page . . .

BOOT ROM	
Setting	JP4
Disabled	Open
Enabled	Closed

LINK INTEGRITY TEST	
Setting	JP5
Disabled	Pins 2 & 3 closed
Enabled	Pins 1 & 2 closed-
Note: Link integrity testing is only operational when the cable type is shielded/unshielded twisted pair.	

BASE MEMORY ADDRESS					
Base Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
IC800h	On	On	Off	On	On
CA00h	On	On	Off	On	Off
CC00h	On	On	Off	Off	On
CE00h	On	On	Off	Off	Off
D000h	On	Off	On	On	On
D200h	On	Off	On	On	Off
D400h	On	Off	On	Off	On
D600h	On	Off	On	Off	Off
D800h	On	Off	Off	On	On
DA00h	On	Off	Off	On	Off
DC00h	On	Off	Off	Off	On
DE00h	On	Off	Off	Off	Off

I/O BASE ADDRESS			
Address	S V1/6	S V1/7	S V1/8
300h	On	On	On
320h	On	On	Off
340h	On	Off	On
360h	On	Off	Off
380h	Off	On	On
3A0h	Off	On	Off
3C0h	Off	Off	On
3E0h	Off	Off	Off