


LONGSHINE MICROSYSTEM, INC.  
LCS-8634 (REV. C)

**NIC Type** Ethernet  
**Transfer Rate** 10Mbps  
**Data Bus** 16-bit ISA  
**Topology** Linear Bus  
**Wiring Type** RG58A/U 50ohm coaxial  
 AUI transceiver via DB-15 port  
**Boot ROM** Available

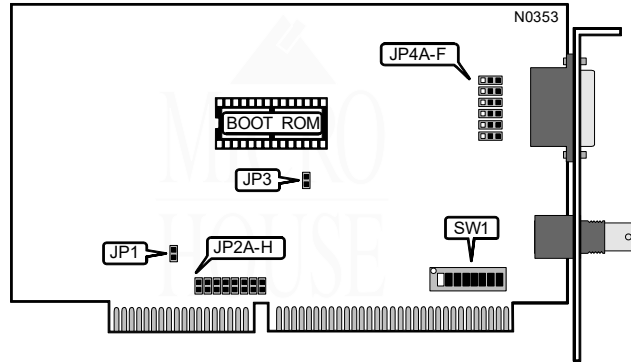

COMPATABILITY MODE	
Setting	JP1
Disabled	Open
Enabled	Closed

Note: If your system does not work with this card, set this option to enabled (closed).

INTERUPT REQUEST								
IRQ	JP2A	JP2B	JP2C	JP2D	JP2E	JP2F	JP2G	JP2H
3	Closed	Open	Open	Open	Open	Open	Open	Open
4	Open	Closed	Open	Open	Open	Open	Open	Open
5	Open	Open	Closed	Open	Open	Open	Open	Open
9	Open	Open	Open	Closed	Open	Open	Open	Open
10	Open	Open	Open	Open	Closed	Open	Open	Open
11	Open	Open	Open	Open	Open	Closed	Open	Open
12	Open	Open	Open	Open	Open	Open	Closed	Open
15	Open	Open	Open	Open	Open	Open	Open	Closed

BOOT ROM	
Setting	JP3
Disabled	Open
Enabled	Closed

Continued on next page . . .

LONGSHINE MICROSYSTEM, INC.  
LCS-8634 (REV. C)

... continued from previous page

CABLE TYPE	
Type	JP4A - JP4F
í RG58A/U 50ohm coaxial	Pins 1 & 2 closed
AUI transceiver via DB-15 port	Pins 2 & 3 closed

BASE MEMORY ADDRESS					
Base Address	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5
í C800h	On	On	Off	On	On
CA00h	On	On	Off	On	Off
CC00h	On	On	Off	Off	On
CE00h	On	On	Off	Off	Off
D000h	On	Off	On	On	On
D200h	On	Off	On	On	Off
D400h	On	Off	On	Off	On
D600h	On	Off	On	Off	Off
D800h	On	Off	Off	On	On
DA00h	On	Off	Off	On	Off
DC00h	On	Off	Off	Off	On
DE00h	On	Off	Off	Off	Off

I/O BASE ADDRESS			
Address	S V1/6	S V1/7	S V1/8
í 300h	On	On	On
320h	On	On	Off
340h	On	Off	On
360h	On	Off	Off
380h	Off	On	On
3A0h	Off	On	Off
3C0h	Off	Off	On
3E0h	Off	Off	Off