


TOSHIBA
TOSHIBALAN (8-BIT ISA BUS)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear
Wiring Type RG58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Not available

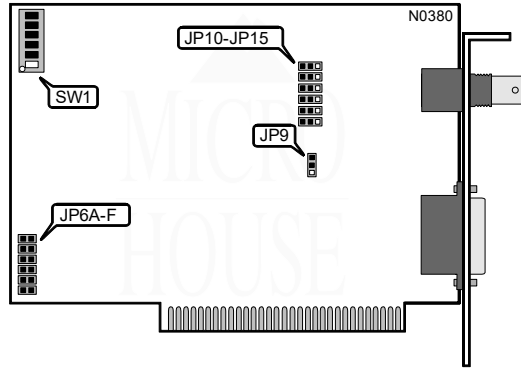

INTERRUPT REQUEST						
IRQ	JP6A	JP6B	JP6C	JP6D	JP6E	JP6F
2	Open	Open	Open	Closed	Open	Open
3	Open	Open	Open	Open	Open	Closed
4	Open	Open	Open	Open	Closed	Open
5	Open	Open	Closed	Open	Open	Open
7	Closed	Open	Open	Open	Open	Open
10	Open	Closed	Open	Open	Open	Open

CABLE TYPE		
Type	JP9	JP10 - JP15
RG58A/U 50ohm coaxial	Pins 2 & 3 closed	Pins 2 & 3 closed
AUI transceiver via DB-15 port	Pins 1 & 2 closed	Pins 1 & 2 closed

Continued on next page . . .

TOSHIBA
TOSHIBALAN (8-BIT ISA BUS)

... continued from previous page

I/O BASE ADDRESS				
Address	SW1/3	SW1/4	SW1/5	SW1/6
200h	On	On	On	On
220h	On	On	On	Off
240h	On	On	Off	On
260h	On	On	Off	Off
280h	On	Off	On	On
2A0h	On	Off	On	Off
2C0h	On	Off	Off	On
2E0h	On	Off	Off	Off
300h	Off	On	On	On
320h	Off	On	On	Off
340h	Off	On	Off	On
360h	Off	On	Off	Off
380h	Off	Off	On	On
3A0h	Off	Off	On	Off
3C0h	Off	Off	Off	On
3E0h	Off	Off	Off	Off

FACTORY CONFIGURED SETTINGS	
Switch	Setting
SW1/1	Off
SW1/2	Off