


THE NETWORK INTERFACE CARD TECHNICAL GUIDE

DIGITAL EQUIPMENT CORPORATION
DEC ETHERWORKS EISA

NIC Type	Ethernet
Transfer Rate	10Mbps
Data Bus	16-bit EISA/32-bit EISA
Topology	Linear bus
Wiring Type	Unshielded twisted pair RG58A/U 50ohm coaxial
Boot ROM	Available

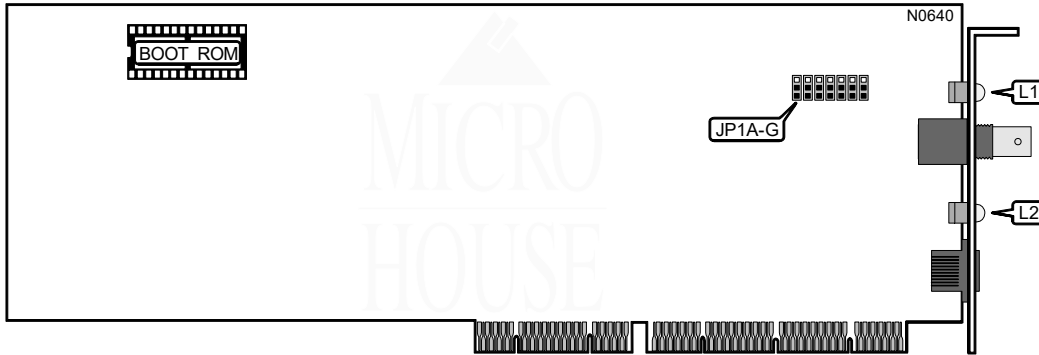

CABLE TYPE	
Type	JP1A-G
Unshielded twisted pair	Pins 1 & 2 closed
RG58A/U 50ohm coaxial	Pins 2 & 3 closed

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
L1	Green	On	Link integrity test/traffic detected on network
L1	Green	Off	Network idle/power Off
L2	Amber	On	Traffic detected on network
L2	Amber	Off	Network idle/power Off

Note: L1 is only functional when utilizing 10BaseT, and L2 is only functional when utilizing 10Base2.

MISCELLANEOUS NOTES

Software included with the card must be used in order to fully configure it. For first-time installation, run the configuration software **before** physically installing the card, else software conflicts may prevent proper installation.