


TULIP COMPUTERS
T T C C - 1 6

NIC Type Token Ring
Transfer Rate 4/16 Mbps
Data Bus 16-bit ISA
Topology Ring
Wiring Type Shielded twisted pair
 Unshielded twisted pair
Boot ROM Not Available

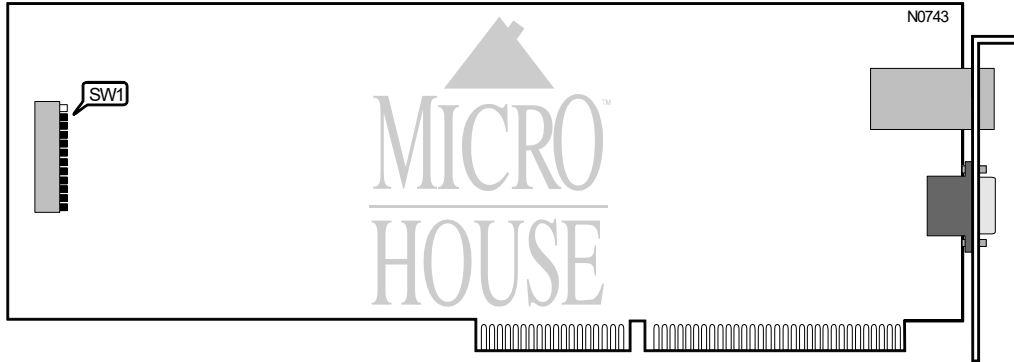

ADDRESS CONFIGURATION				
Base Memory Address	I/O Address	SW1/1	SW1/2	SW1/3
C0000h	86A0h	On	On	On
C4000h	96A0h	Off	On	On
C8000h	A6A0h	On	Off	On
CC000h	B6A0h	Off	Off	On
D0000h	C6A0h	On	On	Off
D4000h	D6A0h	Off	On	Off
D8000h	E6A0h	On	Off	Off
DC000h	F6A0h	Off	Off	Off

CABLE TYPE	
Type	SW1/12
Shielded twisted pair	On
Unshielded twisted pair	Off

DATA RATE SELECT	
Rate	SW1/11
4Mbps	On
16Mbps	Off

Continued on next page . . .

TULIP COMPUTERS
TTCC - 16

... continued from previous page

DMA CONFIGURATION		
DMA	SW1/9	SW1/10
5	On	On
6	Off	On
7	On	Off
Disabled	Off	Off

INTERRUPT SELECT		
IRQ	SW1/4	SW1/5
9	On	On
10	Off	On
11	On	Off
15	Off	Off

SYSTEM SPEED	
Speed	SW1/6
Normal	On
Fast	Off

RPL CONFIGURATION	
Setting	SW1/8
Enabled	Off
Disabled	On

FACTORY CONFIGURED SETTINGS	
Switch	Setting
SW1/7	On

MISCELLANEOUS TECHNICAL NOTES	
Note: Unshielded twisted pair cable is attached to the TTCC-16 adapter via a proprietary adapter cable.	