


LONGSHINE MICROSYSTEM, INC.  
L C S - 8 6 3 6

**NIC Type** Token Ring  
**Transfer Rate** 4/16Mbps  
**Data Bus** 16-bit ISA  
**Topology** Ring  
**Wiring Type** AUI transceiver via DB-15 port  
 Unshielded twisted pair  
**Boot ROM** Not available

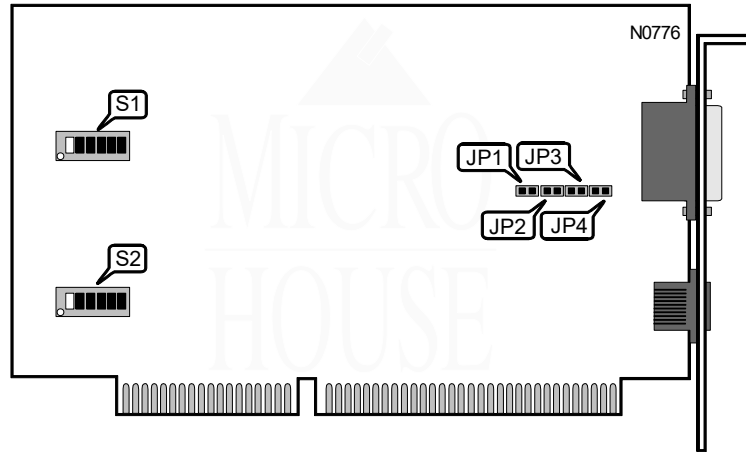

BASE MEMORY ADDRESS SELECT						
Address	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6
CC00h	On	Off	Off	On	On	Off
B000h	Off	On	On	Off	Off	Off
B200h	Off	On	On	Off	Off	On
B400h	Off	On	On	Off	On	Off
B600h	Off	On	On	Off	On	On
B800h	Off	On	On	On	Off	Off
BA00h	Off	On	On	On	Off	On
BC00h	Off	On	On	On	On	Off
BE00h	Off	On	On	On	On	On
C000h	On	Off	Off	Off	Off	Off
C200h	On	Off	Off	Off	Off	On
C400h	On	Off	Off	Off	On	Off
C600h	On	Off	Off	Off	On	On
C800h	On	Off	Off	On	Off	Off

Continued on next page . . .

... continued from previous page

BASE MEMORY ADDRESS SELECT(CONTINUED)						
Address	S1/1	S1/2	S1/3	S1/4	S1/5	S1/6
CA00h	On	Off	Off	On	Off	On
CE00h	Off	On	Off	On	On	On
D000h	On	Off	On	Off	Off	Off
D200h	On	Off	On	Off	Off	On
D400h	On	Off	On	Off	On	Off
D600h	On	Off	On	Off	On	On
D800h	On	Off	On	On	Off	Off
DA00h	On	Off	On	On	Off	On
DC00h	On	Off	On	On	On	Off
DE00h	On	Off	On	On	On	On
E000h	On	On	Off	Off	Off	Off
E200h	On	On	Off	Off	Off	On
E400h	On	On	Off	Off	On	Off
E600h	On	On	Off	Off	On	On
E800h	On	On	Off	On	Off	Off
EA00h	On	On	Off	On	Off	On
EC00h	On	On	Off	On	On	Off
EE00h	On	On	Off	On	On	On

INTERRUPT SELECT		
IRQ	S2/1	S2/2
í IRQ2	Off	Off
IRQ3	Off	On
IRQ6	On	Off
IRQ7	On	On

SHARED RAM		
Size	S2/3	S2/4
í 16KB	Off	On
8KB	Off	Off
32KB	On	Off
64KB	On	On

DATA TRANSFER RATE	
Rate	S2/5
í 16Mbps	On
4Mbps	Off

Continued on next page ...

LONGSHINE MICROSYSTEM, INC.  
L C S - 8 6 3 6

... continued from previous page

I/O ADDRESS SELECT	
Address	S2/6
i A20 - A23h	Off
A24 - A27h	On

CABLE TYPE				
Type	JP1	JP2	JP3	JP4
Thick Ethernet	Open	Open	Open	Open
Unshielded twisted pair	Closed	Closed	Closed	Closed