


LONGSHINE MICROSYSTEM, INC.
LCS-8634MI/8634MI-T REV. D1

NIC Type: Ethernet
 Transfer Rate: 10Mbps
 Data Bus: 16-bit ISA
 Topology: Linear Bus
 Star
 Wiring Type: RG58A/U 50ohm coaxial
 Unshielded twisted pair
 Boot ROM: Available

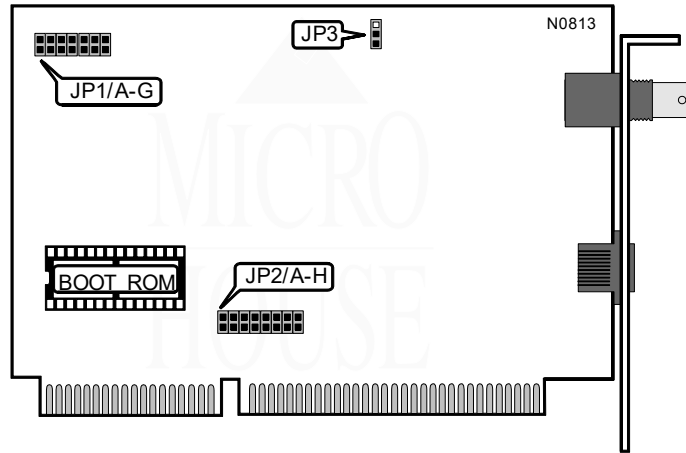

I/O ADDRESS		
Address	JP1/Jumper A	JP1/Jumper B
300h	Open	Open
320h	Closed	Open
340h	Open	Closed
360h	Closed	Closed

PC COMPATIBILITY	
Setting	JP1/Jumper C
Standard	Open
Non-standard	Closed

Note: Set JP1/jumper C to the closed position if timing compatibility problems are encountered.

BOOT ROM	
Setting	JP1/Jumper D
Disable	Open
Enable	Closed

Continued on next page...

LONGSHINE MICROSYSTEM, INC.
LCS-8634MI/8634MI-T REV. D1

... continued from previous page

BOOT ROM ADDRESS			
Address	JP1/Jumper E	JP1/Jumper F	JP1/Jumper G
í C8000h	Open	Closed	Open
C0000h	Open	Open	Open
C4000h	Closed	Open	Open
CC000h	Closed	Closed	Open
D0000h	Open	Open	Closed
D4000h	Closed	Open	Closed
D8000h	Open	Closed	Closed
DC000h	Closed	Closed	Closed

INTERRUPT SELECT - JP2								
IRQ	A	B	C	D	E	F	G	H
í IRQ3	Open	Open	Open	Open	Open	Open	Closed	Open
IRQ2	Open	Open	Open	Open	Open	Open	Open	Closed
IRQ4	Open	Open	Open	Open	Open	Closed	Open	Open
IRQ5	Open	Open	Open	Open	Closed	Open	Open	Open
IRQ10	Open	Open	Open	Closed	Open	Open	Open	Open
IRQ11	Open	Open	Closed	Open	Open	Open	Open	Open
IRQ12	Open	Closed	Open	Open	Open	Open	Open	Open
IRQ15	Closed	Open	Open	Open	Open	Open	Open	Open

CABLE TYPE	
Type	JP3
í RG58A/U 50ohm coaxial	Pins 1 & 2 closed
Unshielded twisted pair	Pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES
The LCS-8634MI uses the RG58A/U 50ohm cable. The LCS-8634MI-T uses the Unshielded Twisted Pair cable.