


DELL COMPUTER CORPORATION

OPTIPLEX E1

Configuration

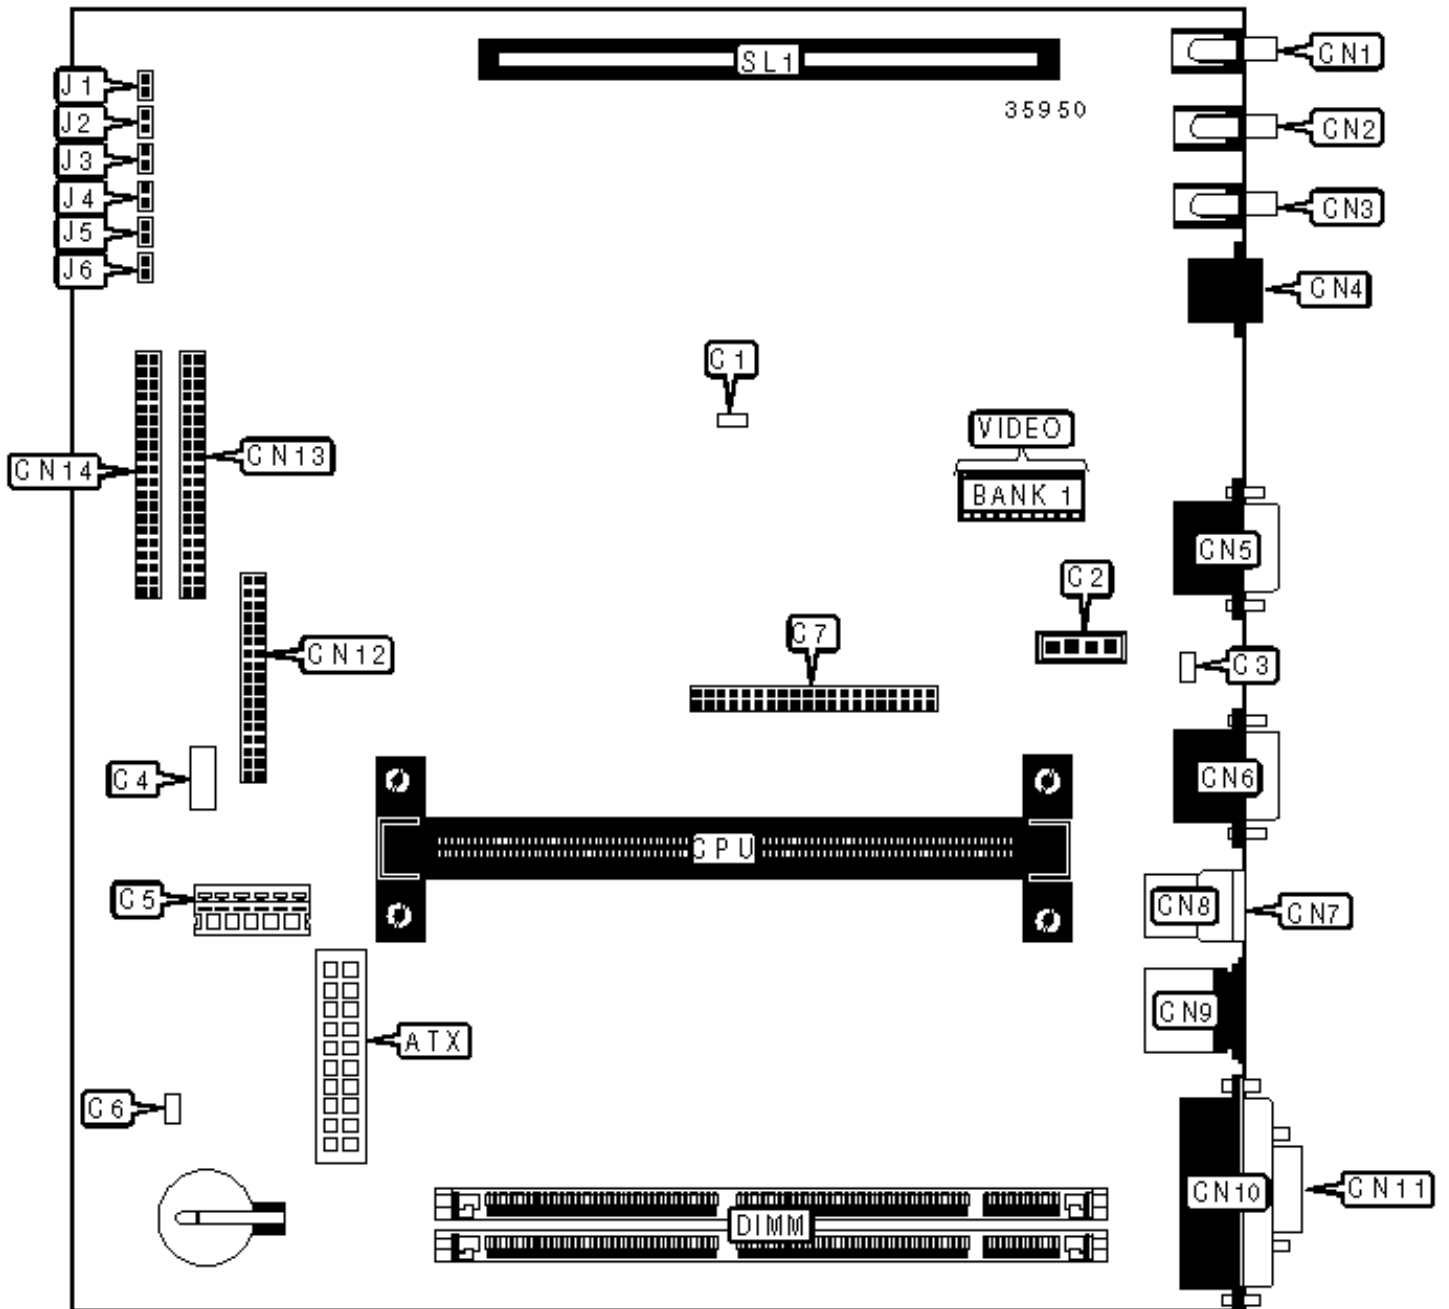

CONNECTIONS

Purpose	Location	Purpose	Location
ATX power connector	ATX	VGA port	CN5
Telephony connector	C1	Serial port 2	CN6
Audio in - CD-ROM	C2	USB connector 1	CN7
CPU fan power	C3	USB connector 2	CN8
Front panel connector	C4	PS/2 mouse port	CN9
3.3v power	C5	Parallel port	CN10
Chassis intrusion connector	C6	Serial port 1	CN11
ATI multimedia connector	C7	Floppy drive interface	CN12
Line in	CN1	IDE interface 2	CN13
Line out	CN2	IDE interface 1	CN14
Microphone in	CN3	Riser slot	SL1
Ethernet 10BaseT connector	CN4		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	J5	Open
Password enabled	J6	Closed
Password disabled	J6	Open

DIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64

24MB	(1) 2M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 4M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 8M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64
136MB	(1) 16M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64

Note: Board accepts SDRAM memory.

CACHE CONFIGURATION

Note: 32KB cache is located on the Celeron CPU.

VIDEO MEMORY CONFIGURATION

Size	Bank 0	Bank 1
2MB	2MB	None
4MB	2MB	2MB

Note: The location of bank 0 is unidentified. The chip size is unidentified.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	J1	J2	J3	J4
233MHz	66MHz	3.5x	Open	Open	Open	Closed
266MHz	66MHz	4x	Open	Open	Closed	Open
300MHz	66MHz	4.5x	Open	Closed	Open	Open
333MHz	66MHz	5x	Closed	Open	Open	Open