


DIGITAL EQUIPMENT CORPORATION

CELEBRIS GL-2

Configuration

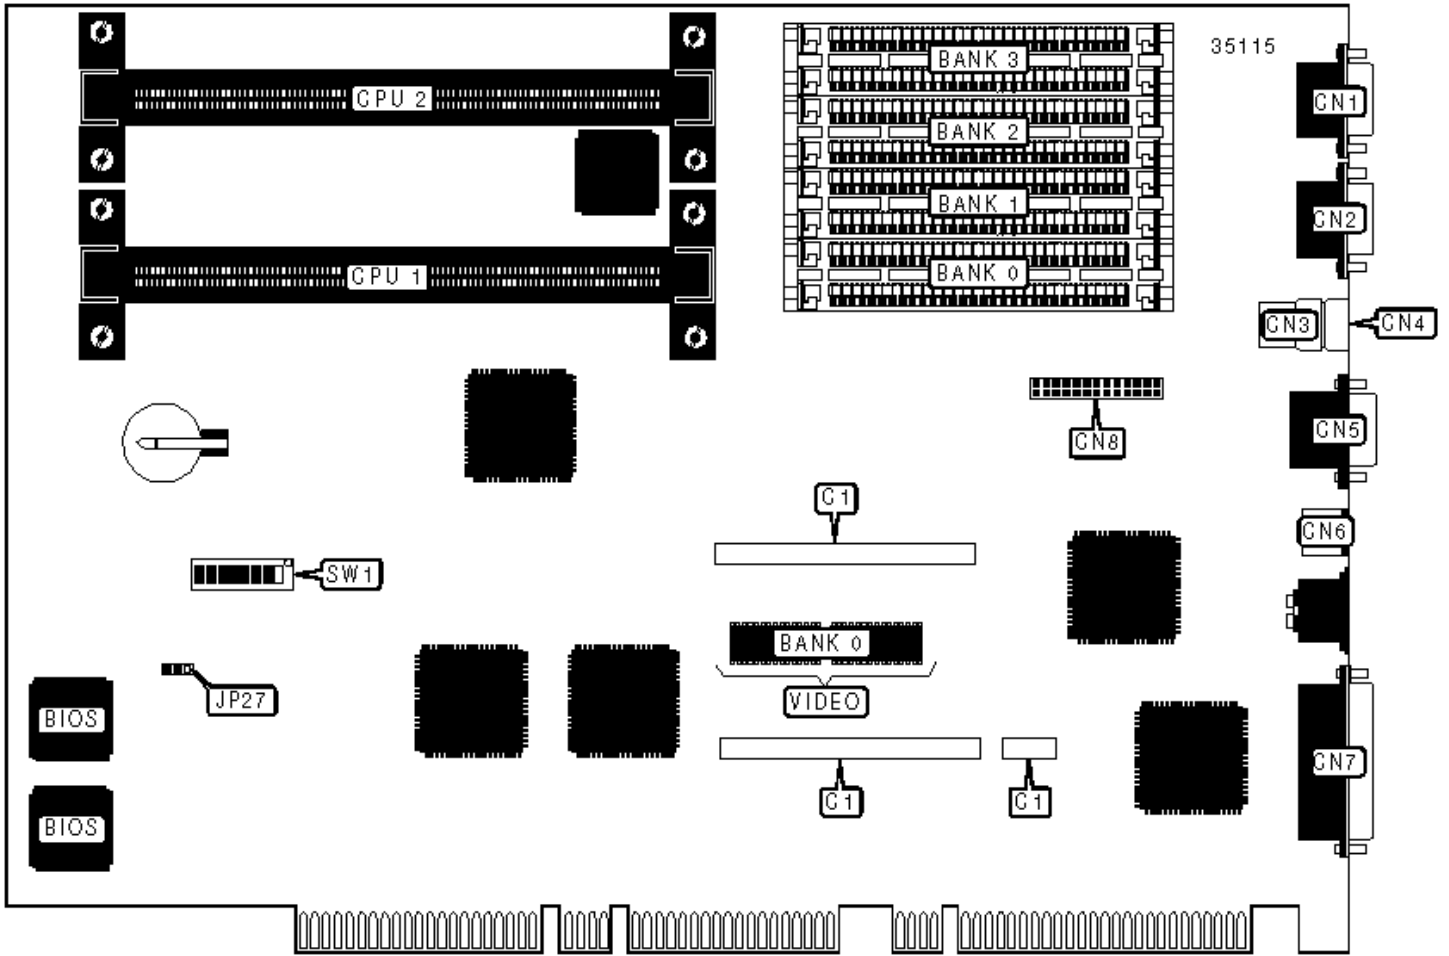

CONNECTIONS

Purpose	Location	Purpose	Location
Serial port	CN1	VGA port	CN5
Serial port	CN2	PS/2 mouse port	CN6
USB connector	CN3	Parallel port	CN7
USB connector	CN4	VGA feature connector	CN8

USER CONFIGURABLE SETTINGS

Function	Label	Position
í Boot block update disabled	J27	Pins 1 & 2 closed
Boot block update enabled	J27	Pins 2 & 3 closed
í Password normal operation	SW1/5	Off
Password clear	SW1/5	On
í Recovery mode disabled	SW1/6	Off
Recovery mode enabled	SW1/6	On
í CMOS memory normal operation	SW1/7	Off
CMOS memory clear	SW1/7	On

SIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(2)1MB x 36	None	None	None
16MB	(2)1MB x 36	(2)1MB x 36	None	None
16MB	(2)2MB x 36	None	None	None
24MB	(2)2MB x 36	(2)1MB x 36	None	None
24MB	(2)1MB x 36	(2)1MB x 36	(2)1MB x 36	None
32MB	(2)1MB x 36	(2)1MB x 36	(2)1MB x 36	(2)1MB x 36

32MB	(2)2MB x 36	(2)2MB x 36	None	None
32MB	(2)4MB x 36	None	None	None
40MB	(2)4MB x 36	(2)1MB x 36	None	None
40MB	(2)2MB x 36	(2)2MB x 36	(2)1MB x 36	None
48MB	(2)4MB x 36	(2)2MB x 36	None	None
48MB	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36	None
56MB	(2)4MB x 36	(2)2MB x 36	(2)1MB x 36	None
56MB	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36	(2)1MB x 36
64MB	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36
64MB	(2)4MB x 36	(2)2MB x 36	(2)2MB x 36	None
64MB	(2)4MB x 36	(2)4MB x 36	None	None
64MB	(2)8MB x 36	None	None	None
72MB	(2)8MB x 36	(2)1MB x 36	None	None
72MB	(2)4MB x 36	(2)2MB x 36	(2)2MB x 36	(2)1MB x 36
72MB	(2)4MB x 36	(2)4MB x 36	(2)1MB x 36	None
80MB	(2)4MB x 36	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36
80MB	(2)4MB x 36	(2)4MB x 36	(2)2MB x 36	None
80MB	(2)8MB x 36	(2)2MB x 36	None	None
88MB	(2)4MB x 36	(2)4MB x 36	(2)2MB x 36	(2)1MB x 36
88MB	(2)8MB x 36	(2)2MB x 36	(2)1MB x 36	None
96MB	(2)8MB x 36	(2)4MB x 36	None	None
96MB	(2)8MB x 63	(2)2MB x 36	(2)2MB x 36	None
96MB	(2)4MB x 36	(2)4MB x 36	(2)2MB x 36	(2)2MB x 36
104MB	(2)4MB x 36	(2)4MB x 36	(2)4MB x 36	(2)1MB x 36
104MB	(2)8MB x 36	(2)4MB x 36	(2)1MB x 36	None
104MB	(2)8MB x 36	(2)2MB x 36	(2)2MB x 36	(2)1MB x 36

108MB	(2)4MB x 36	(2)4MB x 36	(2)4MB x 36	(2)2MB x 36
112MB	(2)8MB x 36	(2)4MB x 36	(2)2MB x 36	None
112MB	(2)8MB x 36	(2)2MB x 36	(2)2MB x 36	(2)2MB x 36
120MB	(2)8MB x 36	(2)4MB x 63	(2)2MB x 36	(2)1MB x 36

SIMM CONFIGURATION (CONT.)

Size	Bank 0	Bank 1	Bank 2	Bank 3
128MB	(2)4MB x 36	(2)4MB x 36	(2)4MB x 36	(2)4MB x 36
128MB	(2)8MB x 36	(2)4MB x 36	(2)4MB x 36	None
128MB	(2)8MB x 36	(2)4MB x 36	(2)2MB x 36	(2)2MB x 36
128MB	(2)8MB x 36	(2)8MBx 36	None	None
128MB	(2)16MB x 36	None	None	None
136MB	(2)8MB x 36	(2)4MB x 36	(2)4MB x 36	(2)1MB x 36
136MB	(2)8MB x 36	(2)8MB x 36	(2)1MB x 36	None
136MB	(2)16MB x 36	(2)1MB x 36	None	None
144MB	(2)8MB x 36	(2)4MB x 36	(2)4MB x 36	(2)2MB x 36
144MB	(2)8MB x 36	(2)8MB x 36	(2)2MB x 36	None
144MB	(2)16MB x 36	(2)2MB x 36	None	None
160MB	(2)8MB x 36	(2)4MB x 36	(2)4MB x 36	(2)4MB x 36
160MB	(2)8MB x 36	(2)8MB x 36	(2)4MB x 36	None
160MB	(2)16MB x 36	(2)4MB x 36	None	None
192MB	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36	None
192MB	(2)16MB x 36	(2)8MB x 36	None	None
200MB	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36	(2)1MB x 36
208MB	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36	(2)2MB x 36
224MB	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36	(2)4MB x 36

256MB	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36	(2)8MB x 36
256MB	(2)16MB x 36	(2)16MB x 36	None	None
264MB	(2)16MB x 36	(2)16MB x 36	(2)1MB x 36	None
272MB	(2)16MB x 36	(2)16MB x 36	(2)2MB x 36	None
288MB	(2)16MB x 36	(2)16MB x 36	(2)4MB x 36	None
320MB	(2)16MB x 36	(2)16MB x 36	(2)8MB x 36	None
384MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	None
392MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	(2)1MB x 36
400MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	(2)2MB x 36
416MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	(2)4MB x 36
448MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	(2)8MB x 36
512MB	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36	(2)16MB x 36

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.


VIDEO MEMORY CONFIGURATION

Note: The size and configuration of the video memory is unidentified. To install memory upgrade, install module in C

CPU SPEED SELECTION

CPU speed	Clock Speed	Multiplier	SW1/1	SW1/2	SW1/3	SW1/4	SW1/8
233MHz	66MHz	3.5x	On	Off	Off	On	On
266MHz	66MHz	4x	On	On	On	Off	On
300MHz	66MHz	4.5x	On	Off	On	Off	On
333MHz	66MHz	5x	On	On	Off	Off	On
366MHz	66MHz	5.5x	On	Off	Off	Off	On

400MHz	66MHz	6x	On	On	On	On	Off
--------	-------	----	----	----	----	----	-----

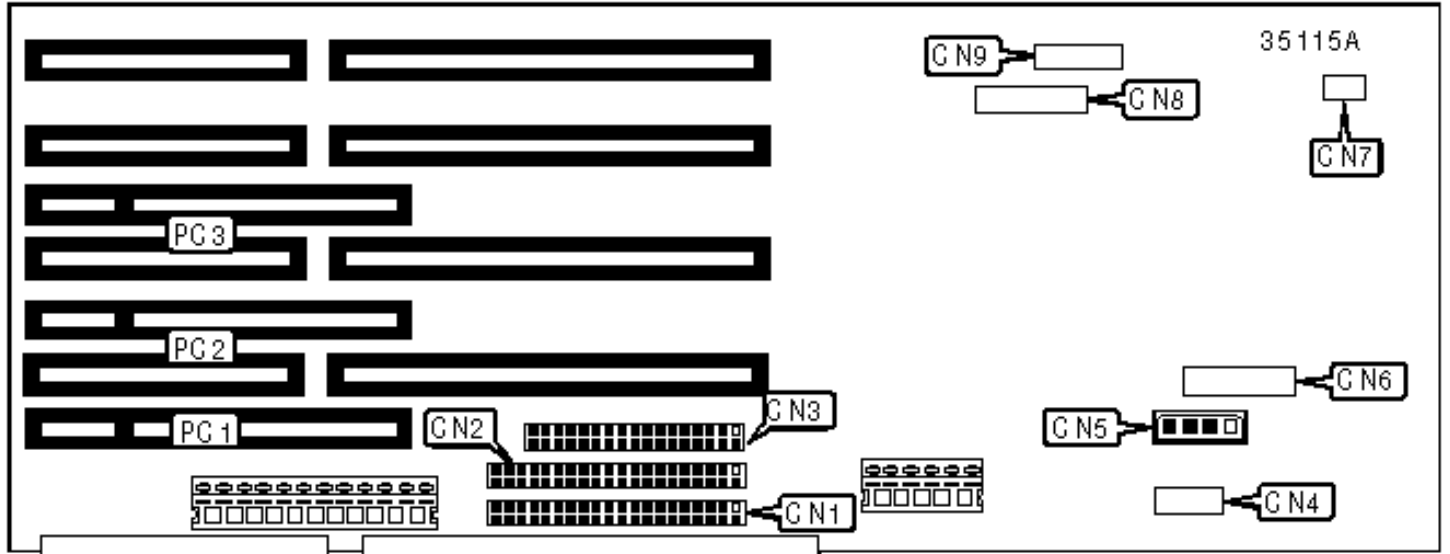

CONNECTIONS

Purpose	Location	Purpose	Location
IDE interface 1	CN1	Audio connector	CN6
IDE interface 2	CN2	Fan connector	CN7
Floppy drive interface	CN3	100Base T connector	CN8
Game/MIDI port	CN4	10Base T/10Base-2 connector	CN9
Audio in - CD-ROM	CN5	32-bit PCI slots	PC1 - PC3