


FREE COMPUTER TECHNOLOGY, INC.

80486EISA (03-0010X-01)

Configuration

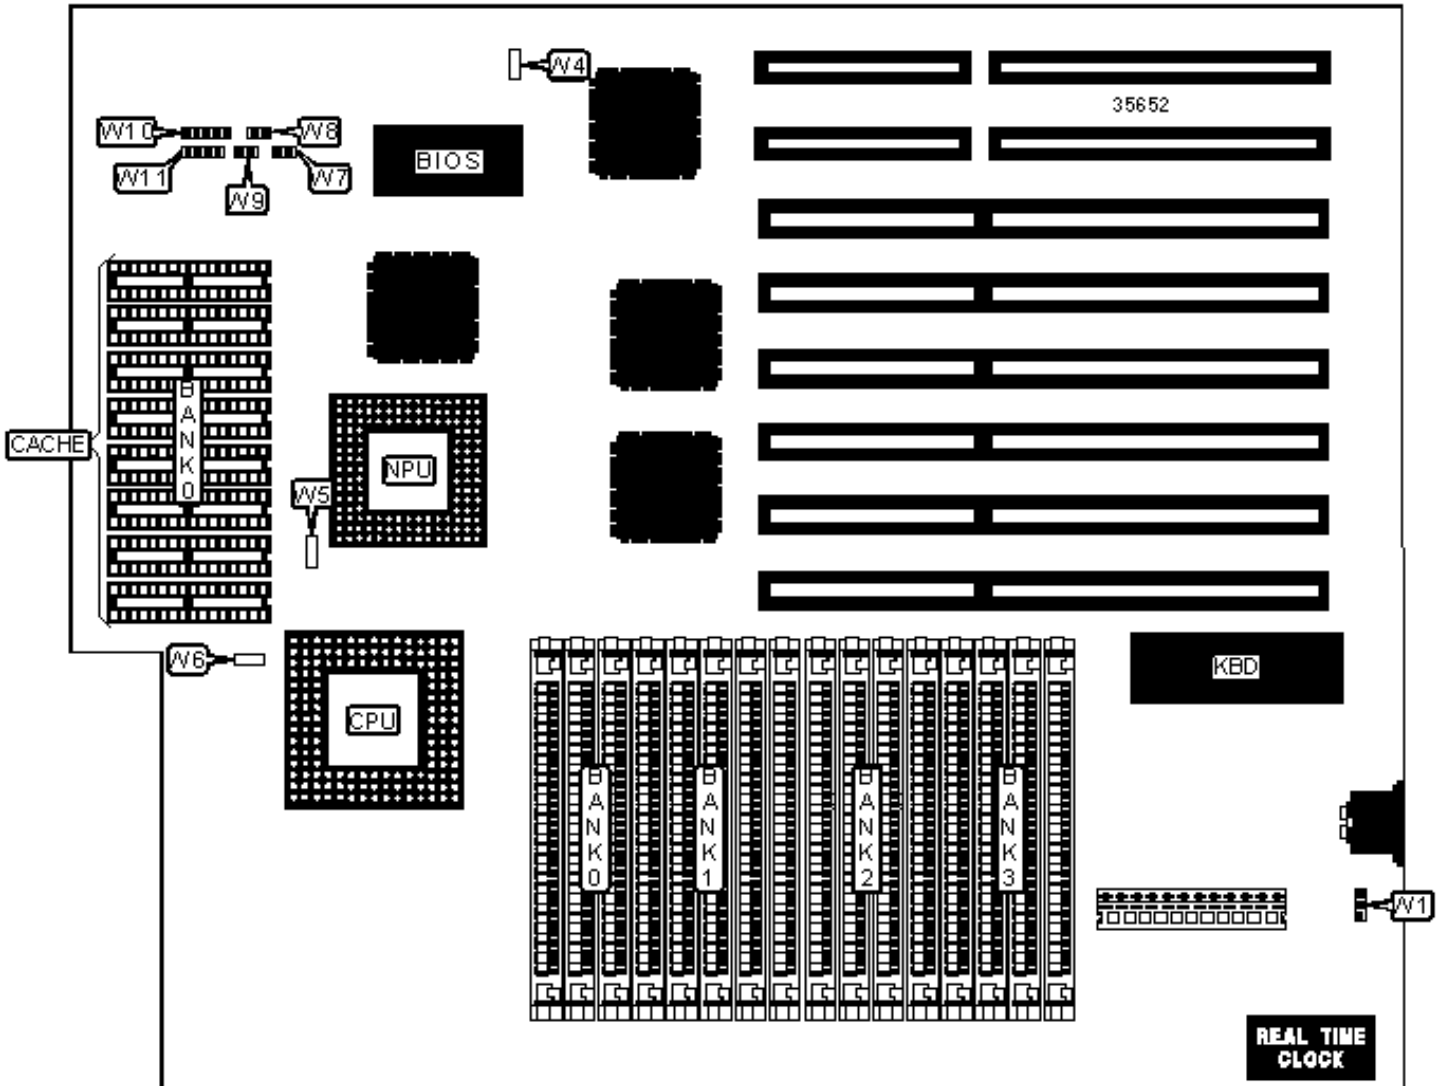

CONNECTIONS

Purpose	Location	Purpose	Location
Reset switch	W7	Power LED & keylock	W10
Turbo switch	W8	Speaker	W11
Turbo LED	W9		

USER CONFIGURABLE SETTINGS

Function	Label	Position
Power good signal detect from power supply	W1	Pins 2 & 3 closed
Power good signal detect from board	W1	Pins 1 & 2 closed
» Factory configured - do not alter	W4	Unidentified
» Factory configured - do not alter	W5	Unidentified
» Factory configured - do not alter	W6	Unidentified

SIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	None	None	None
4MB	(4) 1M x 9	None	None	None
5MB	(4) 1M x 9	(4) 256K x 9	None	None
8MB	(4) 1M x 9	(4) 1M x 9	None	None
9MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	None
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	None
13MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None	None	None
17MB	(4) 4M x 9	(4) 256K x 9	None	None

20MB	(4) 4M x 9	(4) 1M x 9	None	None
32MB	(4) 4M x 9	(4) 4M x 9	None	None
33MB	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9	None
36MB	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9	None
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	None
49MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9
52MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION

Size	Bank 0
0KB	None
512KB	(8) 32K x 8