


Chapter 5: Jumper Settings
BOCA RESEARCH, INC.
BOCALANCARD (BEN120)

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Linear Bus/Star
Wiring Type Unshielded twisted pair
 RG-58A/U 50ohm coaxial
Boot ROM Available

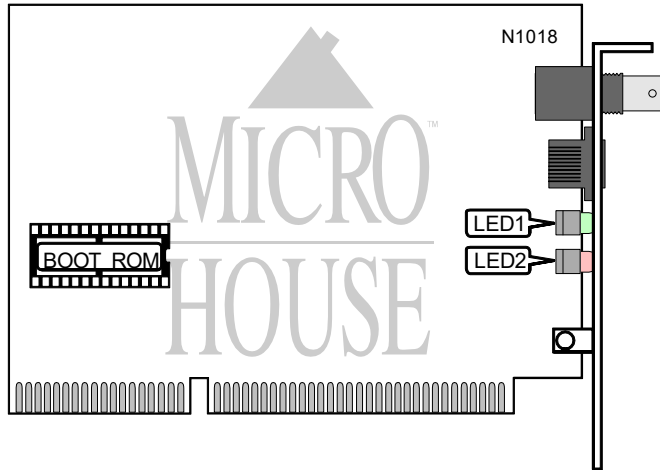

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Network connection is good
LED1	Green	Off	Network connection is broken
LED2	Red	On	Normal polarity
LED2	Red	Off	Reversed polarity
Note: LED2 is programmable to show transmit, receive, polarity, jabber and collision. Polarity is default			