


TEXAS MICRO, INC.

P5000HX WMB

Configuration

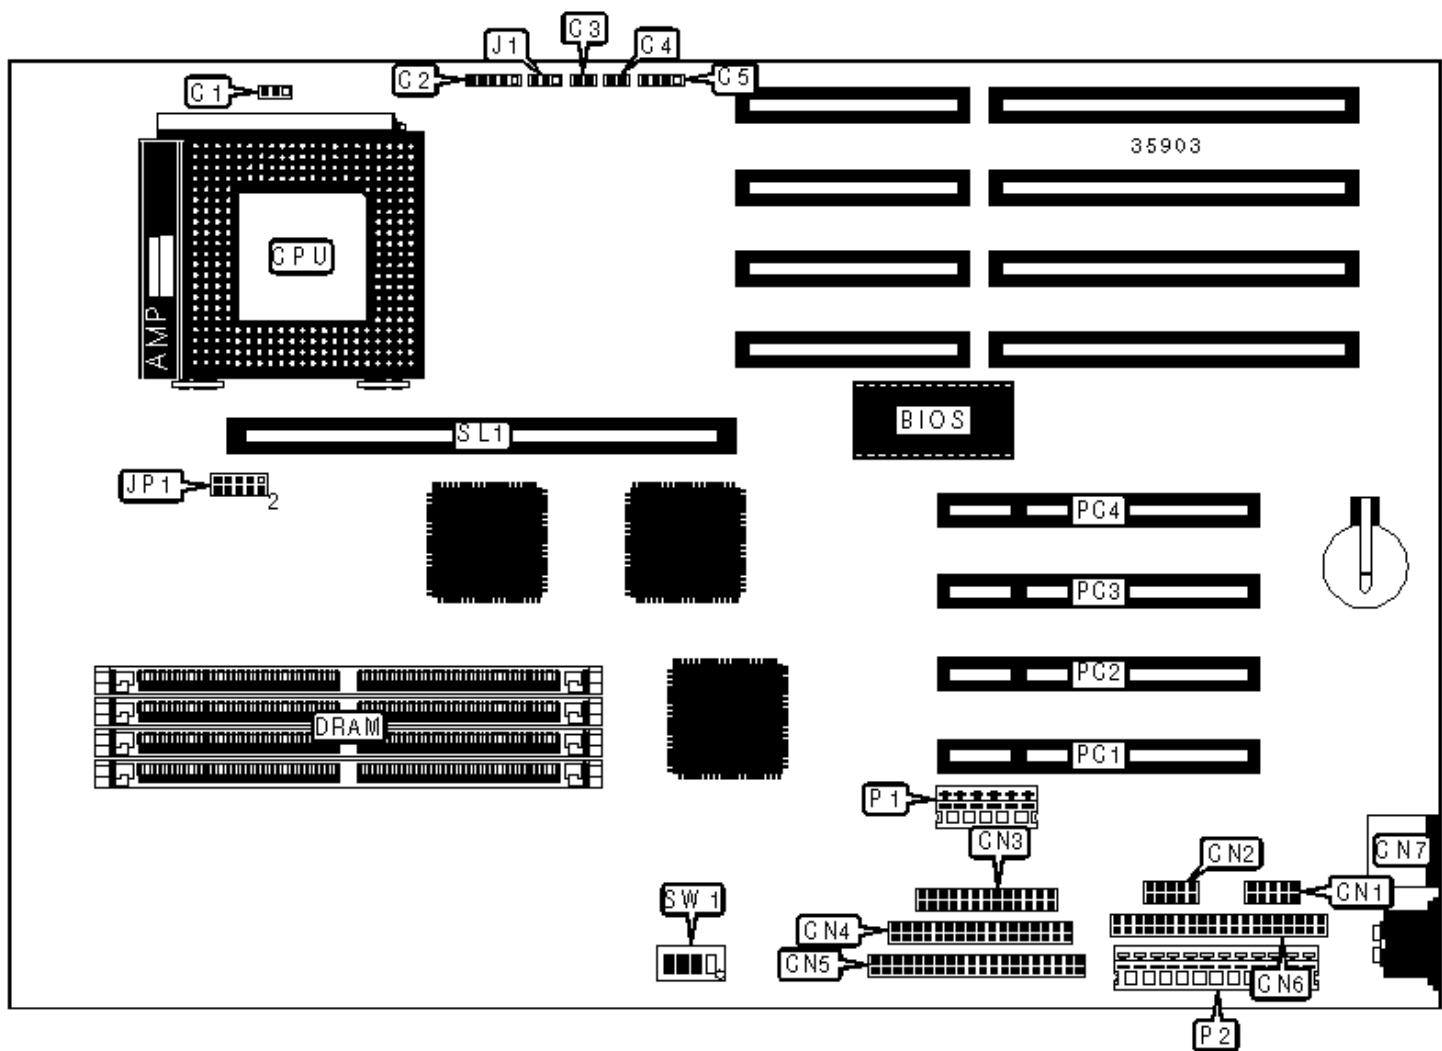

CONNECTIONS

Purpose	Location	Purpose	Location
Chassis fan power	C1	Floppy drive interface	CN4
Power LED & keylock	C2	IDE interface 1	CN5
Reset switch	C3	IDE interface 2	CN6
IDE interface LED	C4	PS/2 mouse port	CN7
Speaker	C5	3.3v power	P1
Serial port 1	CN1	5v power	P2
Serial port 2	CN2	32-bit PCI slots	PC1 – PC4
Parallel port	CN3	Cache slot	SL1

USER CONFIGURABLE SETTINGS

Function		Label	Position
»	Factory configured - do not alter	J1	Unidentified
»	Monitor type select color	SW1/1	On
	Monitor type select monochrome	SW1/1	Off
»	Flash BIOS enabled; crisis recovery mode disabled	SW1/2	Off
	Flash BIOS disabled; crisis recovery mode enabled	SW1/2	On
»	CMOS memory normal operation	SW1/3	Off
	CMOS memory clear	SW1/3	On
»	Factory configured - do not alter	SW1/4	Unidentified

SIMM CONFIGURATION

Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None

16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION

Size	SL1
256KB	256KB module installed
512KB	512KB module installed

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	JP1
166MHz	66MHz	2.5x	Pins 1 & 3, 5 & 7, 6 & 8 closed