


Chapter 5: Jumper Settings
OCEAN INFORMATION SYSTEMS, INC.
ETHERNET-2000+3 LAN ADAPTER

NIC Type Ethernet
Transfer Rate 10Mbps
Data Bus 16-bit ISA
Topology Star
Wiring Type Unshielded twisted pair
 AUI Transceiver via DB-15 port
 RG-58A/U 50ohm coaxial
Boot ROM Available

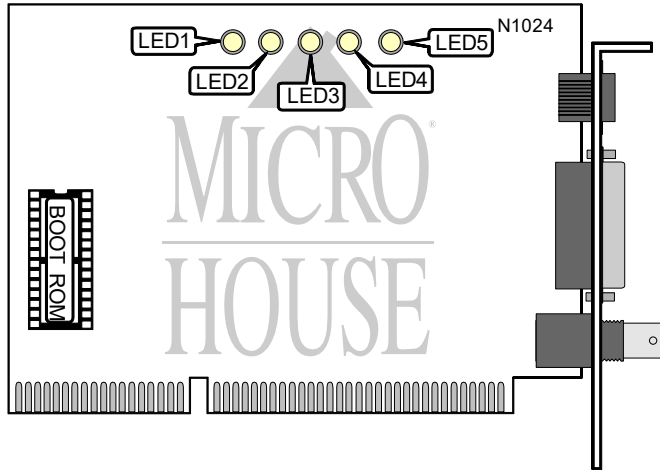

DIAGNOSTIC LED(S)		
LED	Status	Condition
LED1	On	Card is transmitting
LED1	Off	Card is not transmitting
LED2	On	Card is receiving
LED2	Off	Card is not receiving
LED3	On	Collision detected
LED3	Off	Collision not detected
LED4	On	Polarity is reversed
LED4	Off	Polarity is normal
LED5	On	Link status OK
LED5	Off	Link status broken