


TRIGEM MICROSYSTEMS, INC.

LN625

Configuration

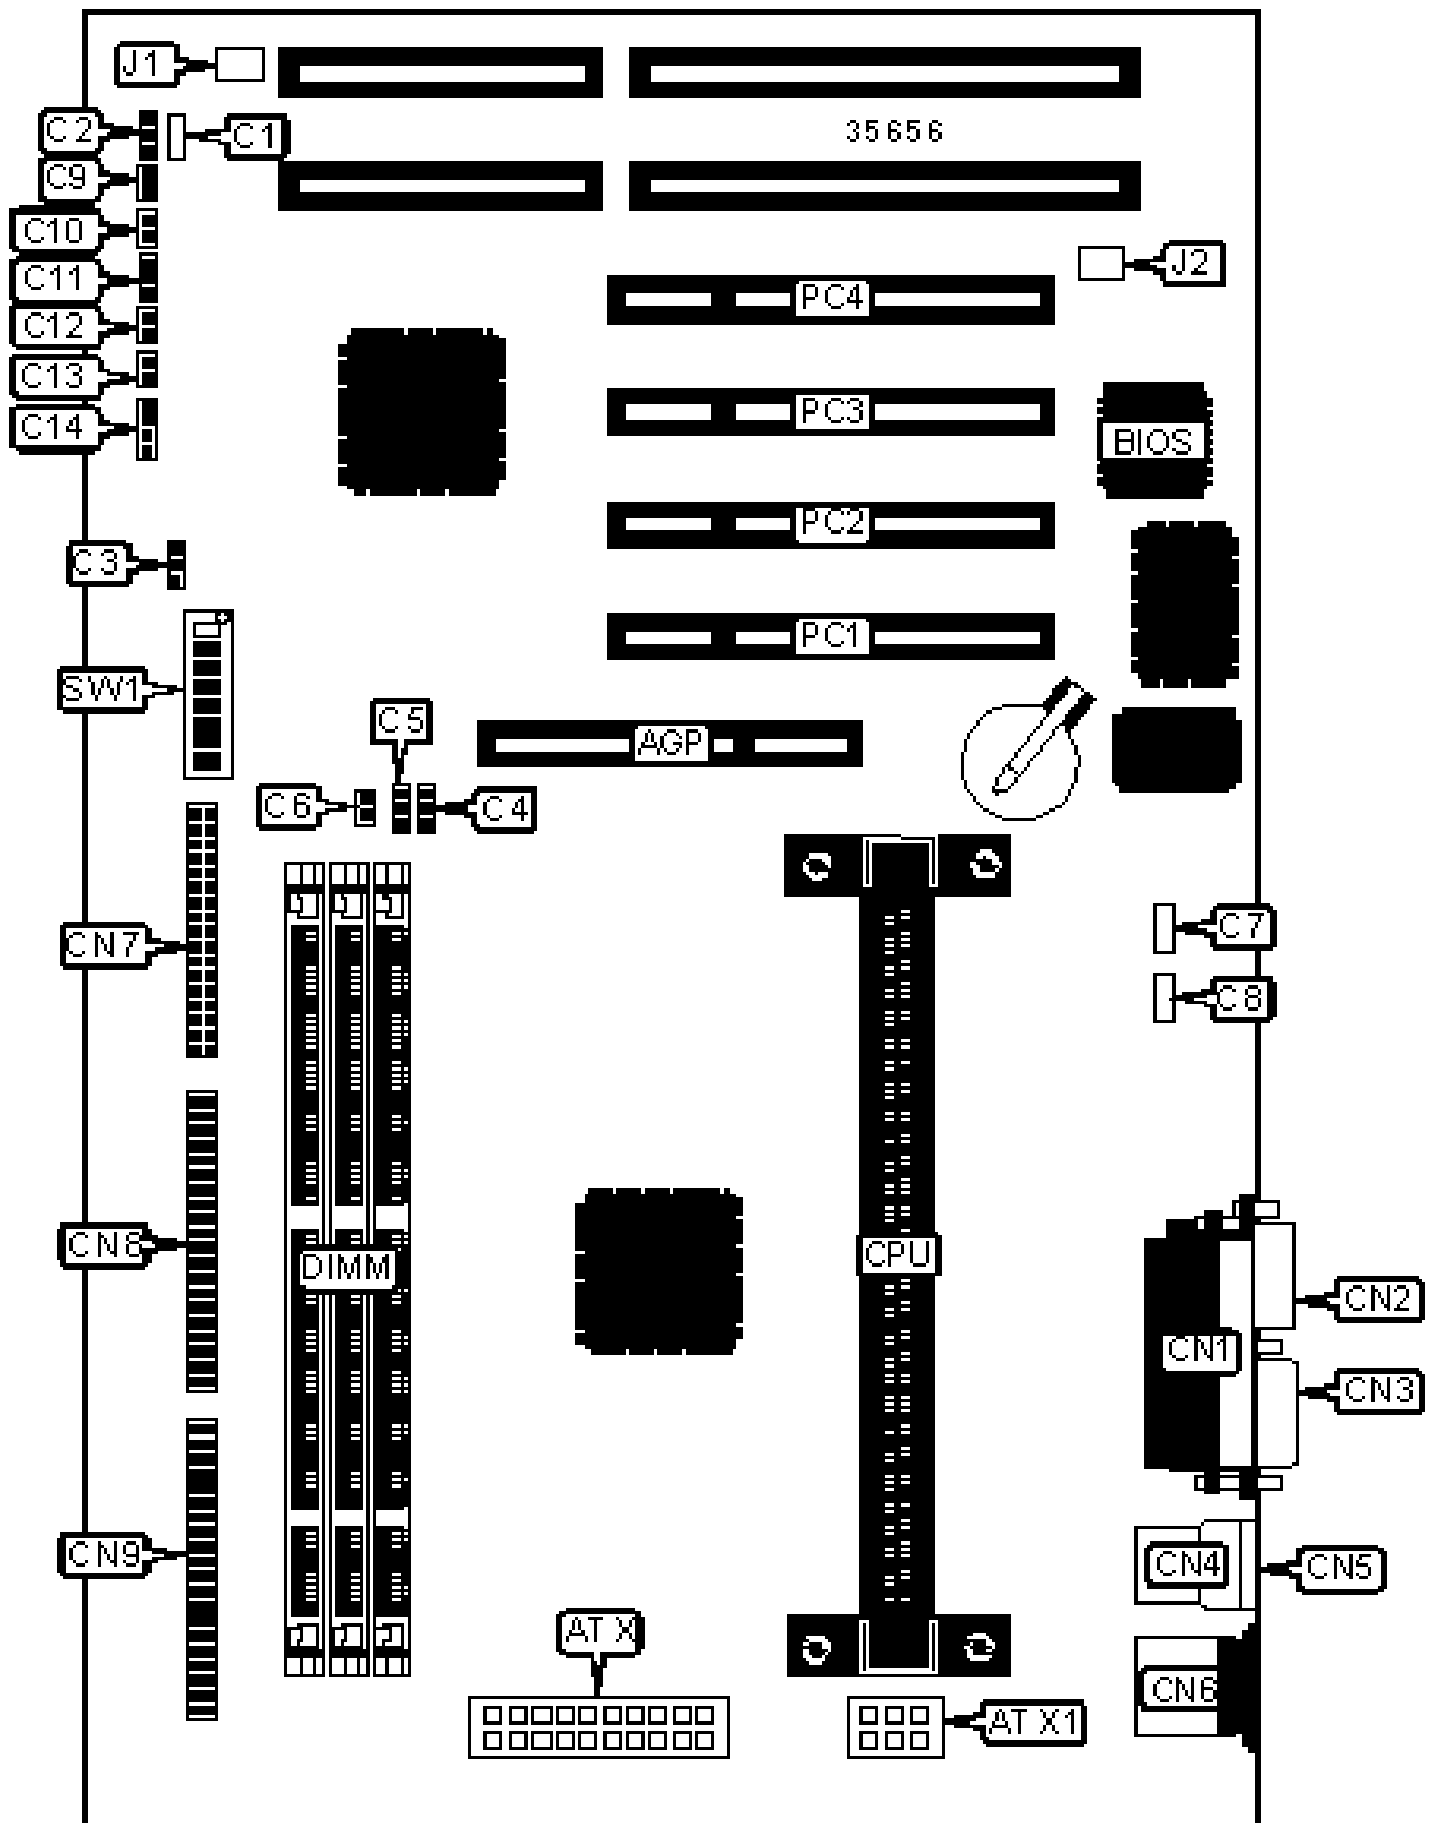

CONNECTIONS

Purpose	Location	Purpose	Location
AGP slot	AGP	Reset switch	C12
ATX power connector	ATX	Green PC connector	C13
ATX auxiliary power	ATX1	Speaker	C14
Chassis fan power	C1	Parallel port	CN1
Power LED	C2	Serial port 2	CN2
Chassis fan power	C3	Serial port 1	CN3
Chassis fan power	C4	USB connector 1	CN4
Wake on ring connector	C5	USB connector 2	CN5
Chassis security connector	C6	PS/2 mouse port	CN6
Wake on LAN connector	C7	Floppy drive interface	CN7
IR connector	C8	IDE interface 1	CN8
IDE interface LED	C9	IDE interface 2	CN9
Soft off power supply	C10	32-bit PCI slots	PC1 – PC4
Keylock	C11		

USER CONFIGURABLE SETTINGS

Function	Label	Position
» Factory configured - do not alter	J1	Unidentified
» Factory configured - do not alter	J2	Unidentified
Floppy drive write protect disabled	SW1/1	Off
Floppy drive write protect enabled	SW1/1	On
Setup access enabled	SW1/2	Off
Setup access disabled	SW1/2	On
Password enabled	SW1/3	Off

	Password disabled	SW1/3	On
»	CMOS memory normal operation	SW1/4	Off
	CMOS memory clear	SW1/4	On

DIMM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2
8MB	(1) 1M x 64	None	None
16MB	(1) 2M x 64	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None
24MB	(1) 2M x 64	(1) 1M x 64	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 4M x 64	None	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
32MB	(1) 2M x 64	(1) 1M x 64	(1) 1M x 64
32MB	(1) 2M x 64	(1) 2M x 64	None
40MB	(1) 4M x 64	(1) 1M x 64	None
40MB	(1) 2M x 64	(1) 2M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 1M x 64	(1) 1M x 64
48MB	(1) 4M x 64	(1) 2M x 64	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
56MB	(1) 4M x 64	(1) 2M x 64	(1) 1M x 64
64MB	(1) 8M x 64	None	None
64MB	(1) 4M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None

72MB	(1) 8M x 64	(1) 1M x 64	None
72MB	(1) 4M x 64	(1) 4M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 1M x 64	(1) 1M x 64
80MB	(1) 8M x 64	(1) 2M x 64	None
80MB	(1) 4M x 64	(1) 4M x 64	(1) 2M x 64
88MB	(1) 8M x 64	(1) 2M x 64	(1) 1M x 64
96MB	(1) 8M x 64	(1) 2M x 64	(1) 2M x 64
96MB	(1) 8M x 64	(1) 4M x 64	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
104MB	(1) 8M x 64	(1) 4M x 64	(1) 1M x 64
112MB	(1) 8M x 64	(1) 4M x 64	(1) 2M x 64
128MB	(1) 16M x 64	None	None
128MB	(1) 8M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None
136MB	(1) 16M x 64	(1) 1M x 64	None
136MB	(1) 8M x 64	(1) 8M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 1M x 64	(1) 1M x 64
144MB	(1) 16M x 64	(1) 2M x 64	None
144MB	(1) 8M x 64	(1) 8M x 64	(1) 2M x 64
152MB	(1) 16M x 64	(1) 2M x 64	(1) 1M x 64
160MB	(1) 16M x 64	(1) 2M x 64	(1) 2M x 64
160MB	(1) 16M x 64	(1) 4M x 64	None

DIMM CONFIGURATION (CON'T)

Size	Bank 0	Bank 1	Bank 2
160MB	(1) 8M x 64	(1) 8M x 64	(1) 4M x 64

168MB	(1) 16M x 64	(1) 4M x 64	(1) 1M x 64
176MB	(1) 16M x 64	(1) 4M x 64	(1) 2M x 64
192MB	(1) 16M x 64	(1) 4M x 64	(1) 4M x 64
192MB	(1) 16M x 64	(1) 8M x 64	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
200MB	(1) 16M x 64	(1) 8M x 64	(1) 1M x 64
208MB	(1) 16M x 64	(1) 8M x 64	(1) 2M x 64
224MB	(1) 16M x 64	(1) 8M x 64	(1) 4M x 64
256MB	(1) 16M x 64	(1) 8M x 64	(1) 8M x 64
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
Note: Board accepts EDO & SDRAM memory.			

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	SW1/5	SW1/6	SW1/7	SW1/8
233MHz	66MHz	3.5x	On	Off	Off	On
266MHz	66MHz	4x	Off	On	On	On
300MHz	66MHz	4.5x	Off	On	Off	On
333MHz	66MHz	5x	Off	Off	On	On