D-LINK DE-220ECT

NIC Type Network Transfer Rate


Data Bus Topology 16-bit ISA Linear Bus,Star

Ethernet 10Mbps

Wiring Type

Unshielded twisted pair RG-58A/U 50ohm coaxial

Available (location unidentified **Boot ROM**

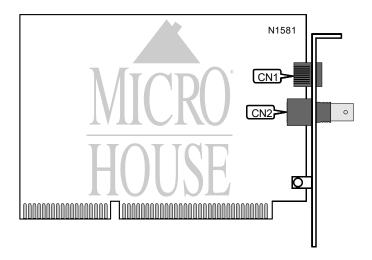

CONNECTIONS				
Function	Label	Function	Label	
Unshielded twisted pair port	CN1	RG-58A/U 50ohm coaxial port	CN2	

DIAGNOSTIC LED(S)				
LED	Color	Status	Condition	
LED1	Green	On	Power is on	
LED1	Green	Blinking	Data is being transmitted on 10Base-T	
LED1	Green	Off	Power is off	
LED2	Green	On	Network connection is good	
LED2	Green	Blinking	Data is being received on 10Base-T	
LED2	Green	Off	Network connection is broken	
LED3	Yellow	On	Abnormal packets detected on network	
LED3	Yellow	Blinking	Collision is detected on network	
LED3	Yellow	Off	Collision is not detected on network	
Note: The locations of LED1, LED2 and LED3 are unidentified.				