


D-LINK DE-220ECAT

NIC Type	Ethernet
Network Transfer Rate	10Mbps
Data Bus	16-bit ISA
Topology	Linear Bus,Star
Wiring Type	Unshielded twisted pair
	AUI transceiver via DB-15 port
	RG-58A/U 50ohm coaxial
Boot ROM	Available (location unidentified)

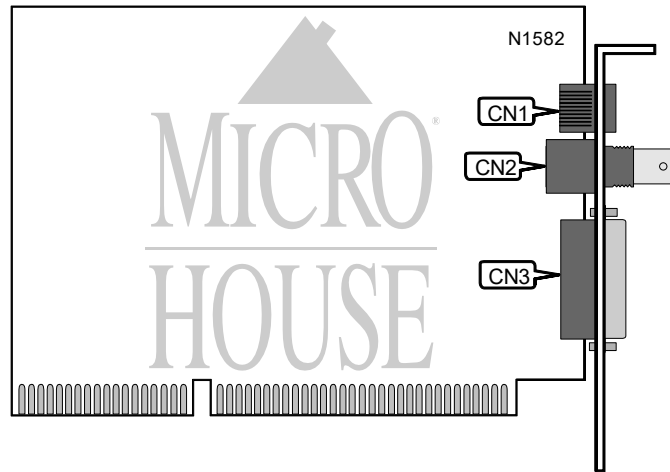

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair port	CN1	AUI transceiver via DB-15 port	CN3
RG-58A/U 50ohm coaxial port	CN2		

DIAGNOSTIC LED(S)			
LED	Color	Status	Condition
LED1	Green	On	Power is on
LED1	Green	Blinking	Data is being transmitted on 10Base-T
LED1	Green	Off	Power is off
LED2	Green	On	Network connection is good
LED2	Green	Blinking	Data is being received on 10Base-T
LED2	Green	Off	Network connection is broken
LED3	Yellow	On	Abnormal packets detected on network
LED3	Yellow	Blinking	Collision is detected on network
LED3	Yellow	Off	Collision is not detected on network

Note: The locations of LED1, LED2 and LED3 are unidentified.