


EAGLE TECHNOLOGY NE32HUB-TPE

NIC Type Ethernet
Network Transfer Rate 10Mbps x 12
Data Bus EISA
Topology Star
Wiring Type Unshielded twisted pair
Boot ROM Not available

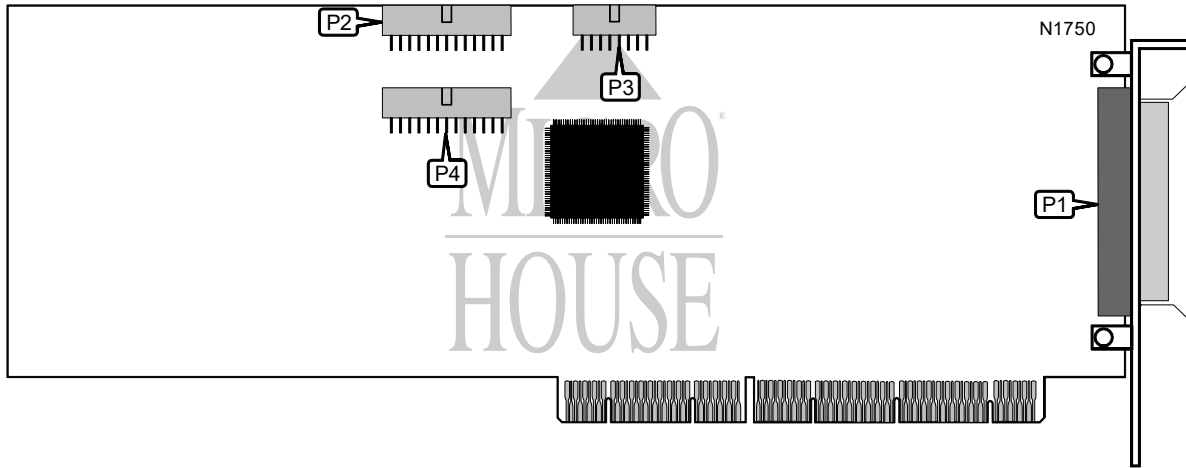

CONNECTIONS			
Function	Label	Function	Label
Unshielded twisted pair ports (12)	P1	NE32HUB-PME connector	P3
Daisy-chain connector - out	P2	Daisy-chain connector - in	P4
Note: Standard RJ-45 unshielded twisted pair connectors are provided on an included cable and external box. Daisy-chain connectors may connect to the NE32HUB-Base card or to another NE32HUB-TPE card.			

MISCELLANEOUS TECHNICAL NOTES
When viewed from the rear of the machine, the NE32HUB-Base card must be installed to the left of all other NE32HUB cards. Up to ten NE32HUB-TPE cards, or nine NE32HUB-TPE cards and one NE32HUB-Base card may be installed into one system. For the NE32HUB-Base and NE32HUB-PME cards, see documents N1749 and N1751.