


EAGLE TECHNOLOGY NE32HUB-PME

NIC Type Ethernet
Network Transfer Rate 10Mbps
Data Bus 8-bit ISA
Topology Linear bus
Wiring Type RG-58A/U 50ohm coaxial
 AUI transceiver via DB-15 port
Boot ROM Not available

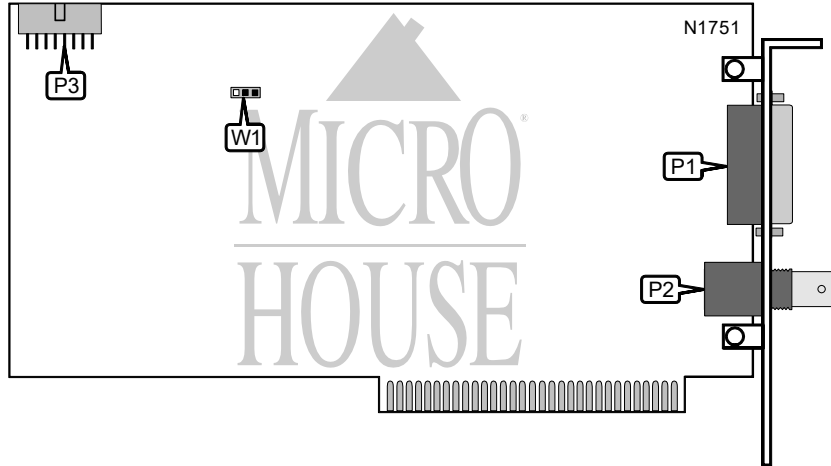

CONNECTIONS			
Function	Label	Function	Label
AUI transceiver via DB-15 port	P1	NE32HUB-Base or -TPE connector	P3
RG-58A/U 50ohm coaxial connector	P2		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Card uses AUI connector	W1	Pins 1 & 2 closed
Card uses coaxial connector	W1	Pins 2 & 3 closed

MISCELLANEOUS TECHNICAL NOTES

When viewed from the rear of the machine, the NE32HUB-Base card must be installed to the left of all other NE32HUB cards. For the NE32HUB-Base and NE32HUB-TPE cards, see documents N1749 and N1750.