


WYSE TECHNOLOGY, INC.

WYSE PC 286 MODEL 2112

Configuration

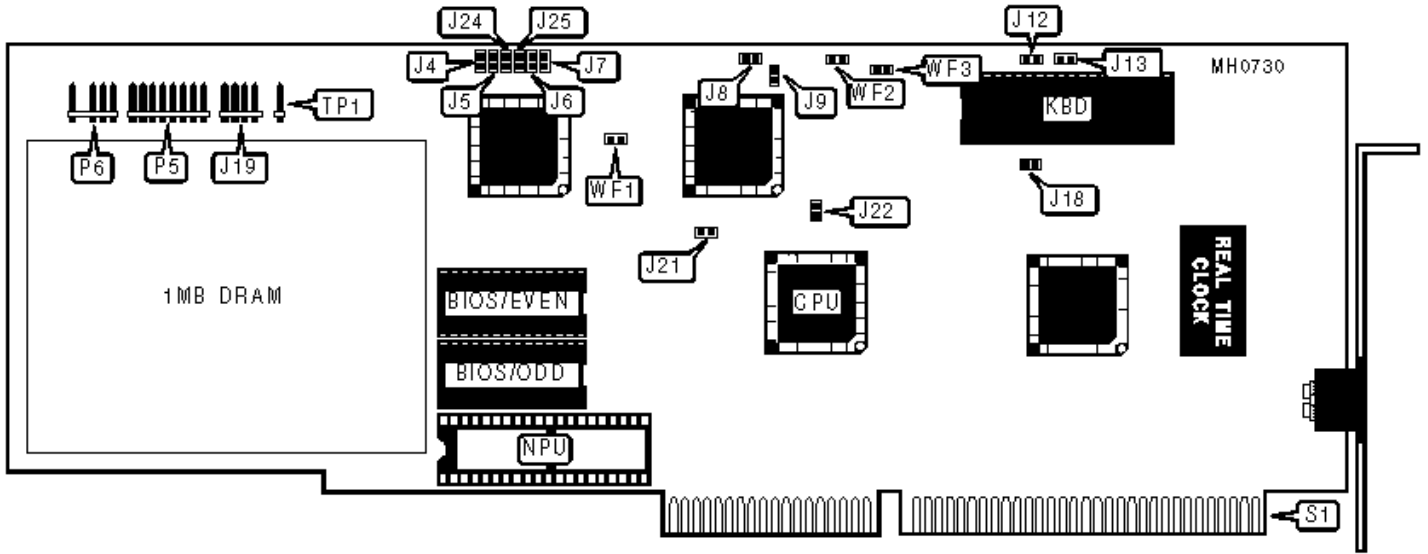

CONNECTIONS

Purpose	Location	Purpose	Location
Front panel connector	P5	Card edge connector	S1
Power good/Speaker	P6	Reset switch	TP1

USER CONFIGURABLE SETTINGS

	Function	Jumper	Position
»	BIOS wait state select 1	J8	Open
	BIOS wait states select 0	J8	Closed
»	DRAM wait state select 1	J9	Open
	DRAM wait states select 0	J9	Closed
»	Monitor type select color	J12	Closed
	Monitor type select monochrome	J12	Open
»	Factory test disabled	J13	Open
	Factory test enabled	J13	Closed
»	Parity check enabled	J18	Closed
	Parity check disabled	J18	Open
»	Factory configured - do not alter	J21	Open
»	Factory configured - do not alter	J22	Open
»	Factory configured - do not alter	WF1	Closed
»	Factory configured - do not alter	WF2	Open
»	Factory configured - do not alter	WF3	Open

DRAM CONFIGURATION

	Base Memory	Extended Memory
	512KB	NONE

	512KB	512KB at 1000000H
	512KB	512KB at 2000000H
	512KB	512KB at 4000000H
	640KB	NONE
»	640KB	384KB at 1000000H
	640KB	384KB at 2000000H
	640KB	384KB at 4000000H

DRAM JUMPER CONFIGURATION					
Base Memory		J6	J7	J24	J25
	512KB	Closed	Closed	Closed	Closed
	512KB	Open	Closed	Closed	Closed
	512KB	Open	Closed	Open	Closed
	512KB	Open	Closed	Open	Open
	640KB	Closed	Open	Closed	Closed
»	640KB	Open	Open	Closed	Closed
	640KB	Open	Open	Open	Closed
	640KB	Open	Open	Open	Open

BIOS CONFIGURATION			
Type		J4	J5
»	27256	Open	Closed
	27128	Open	Open
	27512	Closed	Closed