


# AMERICAN MEGATRENDS, INC. FAST VIEW VLB

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** W5186  
**Highest Resolution Supported** 1280 x 1024  
**Data Bus Type** 32-bit VESA Local Bus  
**Memory Type** VRAM  
**Maximum Onboard Memory** 2048KB

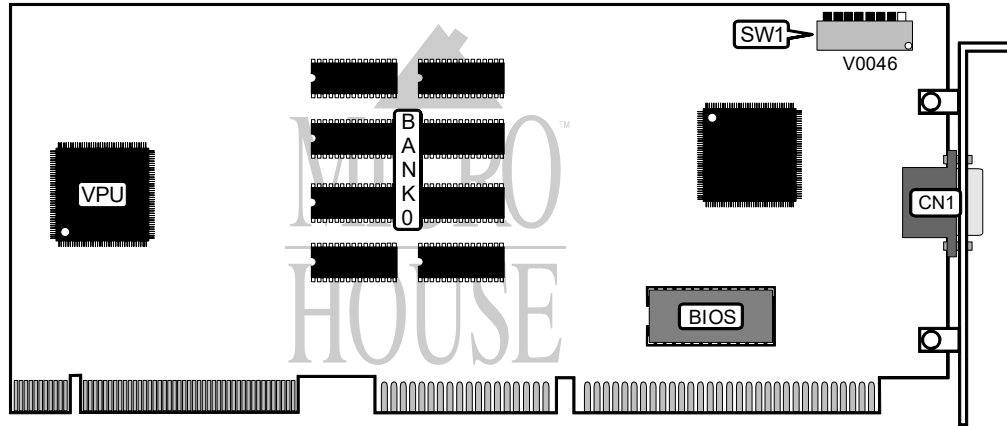

CONNECTIONS	
Purpose	Location
15-pin analog video port	CN1

DATA BUS WIDTH SELECTION			
Setting	S V1/1	S V1/4	S V1/5
16-bits wide	Off	On	On
8-bits wide	On	Off	Off

INTERRUPT SELECTION	
IRQ 2/9	SW1/2
Disabled	Off
Enabled	On

ZERO WAIT STATE SELECTION	
Setting	SW1/3
Enabled	On
Disabled	Off

Continued on next page . . .

AMERICAN MEGATRENDS, INC.  
 FAST VIEW VLB

... continued from previous page

MEMORY BASE ADDRESS SELECTION		
Address	SW1/8	SW1/9
C000h	On	On
D000h	On	Off
E000h	Off	On
F000h	Off	Off

FACTORY CONFIGURED - DO NOT ALTER	
Switch	Position
SW1/8	On