


DD & TT ENTERPRISE USA COMPANY
DT-911S

Category Video
Video Types Supported XVGA
Video Processor S3 86C911
Highest Resolution Supported 1024 X 768
Data Bus Type 16-bit ISA
Memory Type VRAM
Maximum Onboard Memory 1024KB

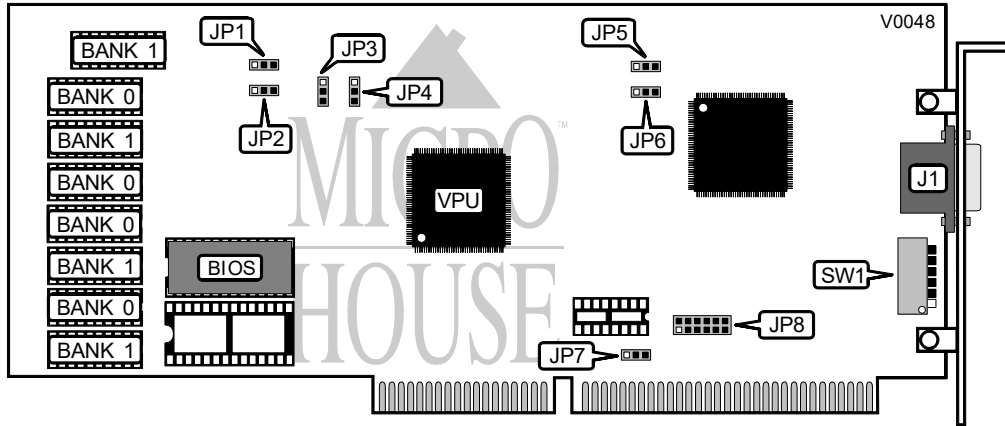

CONNECTIONS	
Purpose	Location
15-pin analog video port	J1

VIDEO MEMORY SPEED SELECTION	
Speed	JP3
100ns	Pins 1 & 2 closed
80ns	Pins 2 & 3 closed

INTERRUPT SELECTION	
IRQ 2/9	JP8
Disabled	Open
Enabled	Pins 11 & 12 closed

Continued on next page . . .

DD & TT ENTERPRISE USA COMPANY
DT-911S

. . . continued from previous page

MONITOR TYPE SELECTION							
Type	Rate	SW1/1	SW1/2	SW1/3	SW1/4	SW1/5	SW1/6
Basic VGA, 2A, 3D, 4D, 5D	60Hz	On	Off	On	Off	On	Off
NEC 3D, 4D, 5D	70Hz	On	Off	On	Off	Off	On
NEC 3D, 4D, 5D	60Hz	On	Off	Off	On	On	Off
NEC 4D, 5D	70Hz	On	On	Off	On	Off	On
2A, 3D	56Hz	Off	On	On	Off	On	Off
2A, 3D	43Hz	Off	On	On	Off	Off	On
4D, 5D	60Hz	Off	On	Off	On	On	Off
5D	70Hz	Off	On	Off	On	Off	On

FACTORY CONFIGURED - DO NOT ALTER	
Jumper	Position
JP2	Pins 2 & 3 closed
JP4	Pins 2 & 3 closed
JP5	Pins 2 & 3 closed
JP6	Pins 1 & 2 closed
JP7	Pins 1 & 2 closed

VRAM CONFIGURATION			
Size	Bank 0	Bank 1	P1
512KB	(4) 256K x 4 VRAM	NONE	Pins 2 & 3 closed
1024KB	(4) 256K x 4	(4) 256K x 4	Pins 1 & 2 closed