


ADVANCED INTEGRATION RESEARCH, INC.
 AVIEW2E (VERSION 1.2)

Category Video
Video Types Supported XVGA
Video Processor 86C911
Highest Resolution Supported 1024 x 768
Data Bus Type 16-bit EISA
Memory Type VRAM
Maximum Onboard Memory 1024KB

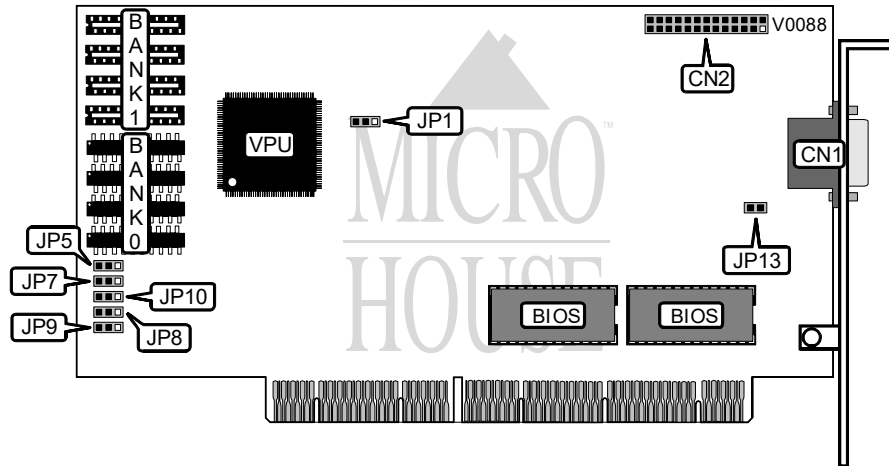

CONNECTIONS			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VGA feature connector	CN2

VIDEO INTERRUPT SELECTION	
IRQ 2/9	JP1
Disabled	Open
Enabled	Closed

640 x 480 REFRESH RATE SELECTION			
Rate	P8	P9	P10
60Hz	Pins 1 & 2 closed	Pins 1 & 2 closed	Pins 1 & 2 closed
70Hz	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 1 & 2 closed

Continued on next page . . .

ADVANCED INTEGRATION RESEARCH, INC.
 AVIEW2E (VERSION 1.2)

... continued from previous page

800 x 600 REFRESH RATE SELECTION			
Rate	P8	P9	P10
60Hz	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 1 & 2 closed
70Hz	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 1 & 2 closed

1024 x 768 REFRESH RATE CONFIGURATION				
Rate	Mode	JP8	JP9	JP10
43Hz	Interlaced	Pins 2 & 3 closed	Pins 1 & 2 closed	Pins 2 & 3 closed
60Hz	Non-Interlaced	Pins 1 & 2 closed	Pins 2 & 3 closed	Pins 2 & 3 closed
70Hz	Interlaced	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed

ZERO WAIT STATE SELECTION	
Setting	JP13
Enabled	Closed
Disabled	Open

VRAM CONFIGURATION			
Size	Bank 0	Bank 1	P5
256KB	(4) 256K x 4 ZIP	None	Pins 2 & 3 closed
512KB	(4) 256K x 4 ZIP	(4) 256K x 4 ZIP	Pins 1 & 2 closed