


# FIRST INTERNATIONAL COMPUTER, INC.

## VGA-805P-V

**Category** Video  
**Video Type** XVGA  
**Video Processor** S3, Inc.  
**Highest Resolution Supported** 1280 x 1024  
**Data Bus Type** 32-bit VESA  
**Memory Type** DRAM  
**Maximum Onboard Memory** 2MB

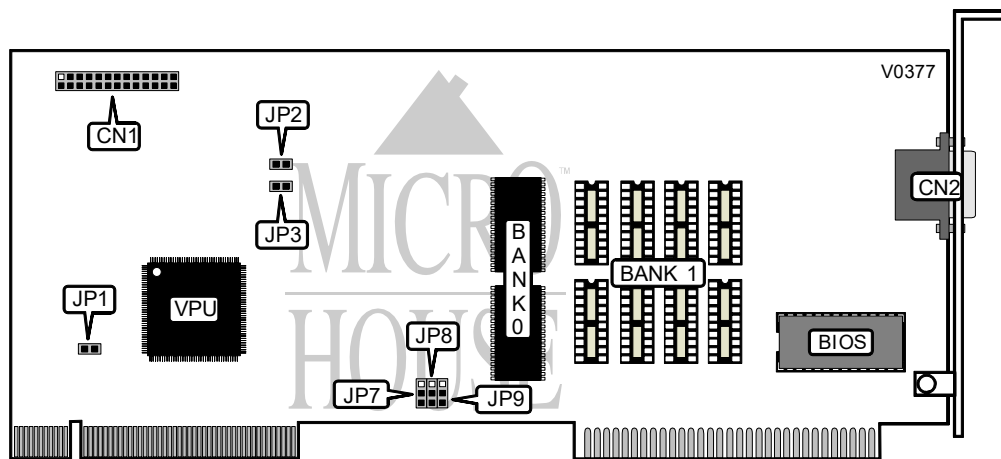

CONNECTIONS			
Purpos	Location	Purpos	Location
VESA Feature Connector	CN1	15-pin analog video port	CN2

INTERRUPT SELECTION	
IRQ9	JP1
Disabled	Pins 1 & 2 open
Enabled	Pins 1 & 2 closed

MCLK SELECTION		
Setting	JP2	JP3
50MHz	Open	Open
45MHz	Closed	Closed
38MHz	Closed	Open
52MHz	Open	Closed

Continued on next page . . .

**FIRST INTERNATIONAL COMPUTER, INC.**  
**VGA-805P-V**

. . . continued from previous page

REFRESH RATES		
Refresh	JP7	JP8
56Hz Non-Interlaced	Pins 2 & 3 closed	Pins 1 & 2 closed
60Hz Non-Interlaced	Pins 1 & 2 closed	Pins 2 & 3 closed
70/72Hz Non Interlaced	Pins 1 & 2 closed	Pins 1 & 2 closed
43Hz Interlaced	Pins 2 & 3 closed	Pins 2 & 3 closed

DAC LOCAL ACCESS	
Setting	JP9
Enabled	Pins 1 & 2 closed
Disabled	Pins 2 & 3 closed

VIDEO MEMORY CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(2) 512 x 8	None
2MB	(2) 512 x 8	(8) 256 x 4