


# AMERICAN MEGATRENDS, INC.

## FAST VIEW EISA

**Category** Video  
**Video Types Supported** XVGA  
**Video Processor** S3  
**Highest Resolution Supported** 1280 X 1024  
**Data Bus Type** 16-bit EISA  
**Memory Type** VRAM  
**Maximum Onboard Memory** 1MB

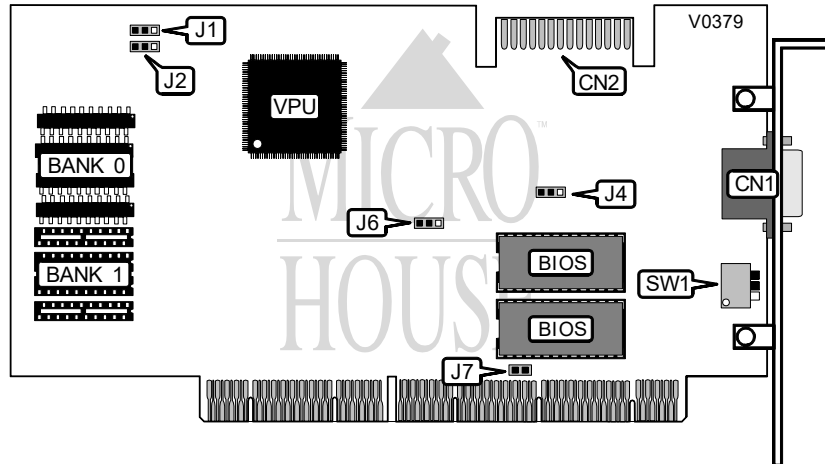

REFRESH RATE CONFIGURATION			
Purpose	Location	Purpose	Location
15-pin analog video port	CN1	VESA Feature Connector	CN2

640 X 480 REFRESH RATES			
Refresh	SW1 switch 1	SW1 switch 2	SW1 switch 3
60Hz	Off	Off	Off
70Hz	On	Off	Off

800 X 600 REFRESH RATES			
Refresh	SW1 switch 1	SW1 switch 2	SW1 switch 3
60Hz	Off	On	Off
70Hz	On	On	Off
56Hz	Off	Off	On

1024 X 768 REFRESH RATES			
Refresh	SW1 switch 1	SW1 switch 2	SW1 switch 3
43Hz	On	Off	On
60Hz	Off	On	On
70Hz	On	On	On

Continued on next page . . .

**AMERICAN MEGATRENDS, INC.**  
**FAST VIEW EISA**

... continued from previous page

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J2	Pins 1 & 2 closed
J4	Pins 1 & 2 closed
J6	Pins 1 & 2 closed
J7	Open

VIDEO MEMORY CONFIGURATION			
ize	B nk 0	B nk 1	J1
512KB	(4) 44256 ZIP	None	Pins 2 & 3 closed
1024KB	(4) 44256 ZIP	(4) 44256 ZIP	Pins 1 & 2 closed