


ASLAN COMPUTER CORPORATION VGA GRAPHICS ADAPTER

Category Video
Video Types Supported XVGA
Video Processor Unidentified
Highest Resolution Supported 1280 x 1024
Data Bus Type 16-bit ISA
Memory Type DRAM
Maximum Onboard Memory 1024KB

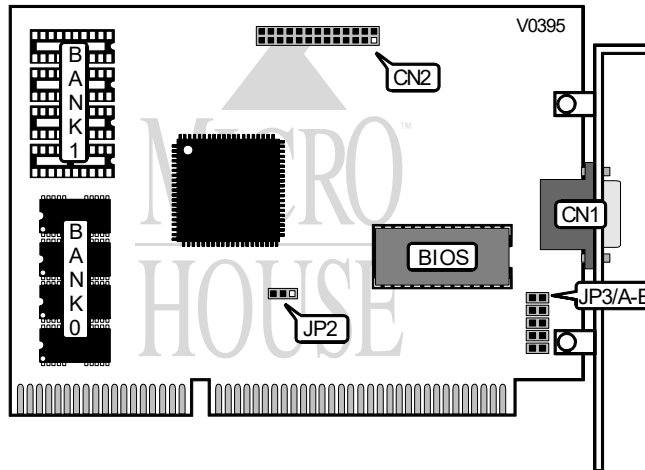

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15 pin analog video port	CN1	Feature connector	CN2

ZERO WAIT STATE	
Setting	JP2
Enabled	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed

800 x 600 REFRESH RATES			
Refresh	Mode	J '3/A	J '3/B
56Hz	Non-interlaced	Open	Open
56Hz	Non-interlaced	Closed	Open
60Hz	Non-interlaced	Open	Closed
72Hz	Non-interlaced	Closed	Closed

Continued on next page . . .

ASLAN COMPUTER CORPORATION
VGA GRAPHICS ADAPTER

... continued from previous page

1024 x 768 REFRESH RATES			
Refresh	Mode	J'3/A	J'3/B
60Hz	Non-interlaced	Open	Closed
70Hz	Non-interlaced	Closed	Open
72Hz	Non-interlaced	Closed	Closed
87Hz	Interlaced	Open	Open

SCAN RATE CONFIGURATION		
Horizontal Scan Rate	Vertical Scan Rate	JP3/E
31.5Khz	60, 70Hz	Open
40Khz	75, 88Hz	Closed

DRAM CONFIGURATION		
Size	BANK	BANK
512KB	(4) 256K x 4	NONE
1MB	(4) 256K x 4	(4) 256K x 4