


GATEWAY 2000 TELEPATH DATA/FAX

Modem Type Data (Asynchronous/Synchronous)/Fax
Maximum Data Rate 14.4Kbps
Maximum Fax Rate 9600bps
Data Bus 8-bit ISA
Fax Class Class I & II
Data Modulation Protocol Bell 103A & 212A, CCITT V.32bis & V.32 & V.22 V.22bis & V.21
Fax Modulation Protocol CCITT V.17 & V.29 & V.27ter
Error Correction/Compression CCITT V.42 & V.42bis & MNP 2-5

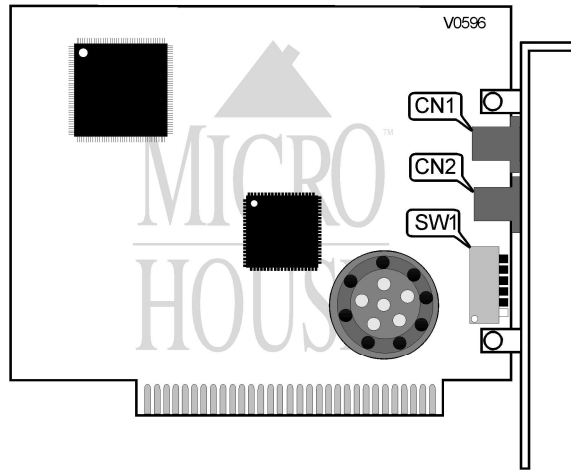

CONNECTIONS			
Purpose	Location	Purpose	Location
Line in	CN1	Line out	CN2

COM PORT SETTINGS		
COM	SW1/3	SW1/4
COM1	On	On
COM2	Off	On
COM3	On	Off
COM4	Off	Off

INTERRUPT SELECT				
IRQ	SW1/3	SW1/4	SW1/5	SW1/6
IRQ2	Off	Off	Off	On
IRQ3	Off	Off	On	Off
IRQ4	Off	On	Off	Off
IRQ5	On	Off	Off	Off