


FIRST INTERNATIONAL COMPUTER, INC. VGA-805-V

Category	Video
Video Types Supported	XVGA
Video Processor	S3, Inc.
Highest Resolution Supported	1280 x 1024
Data Bus Type	VESA local bus
Memory Type	DRAM
Maximum Onboard Memory	2MB

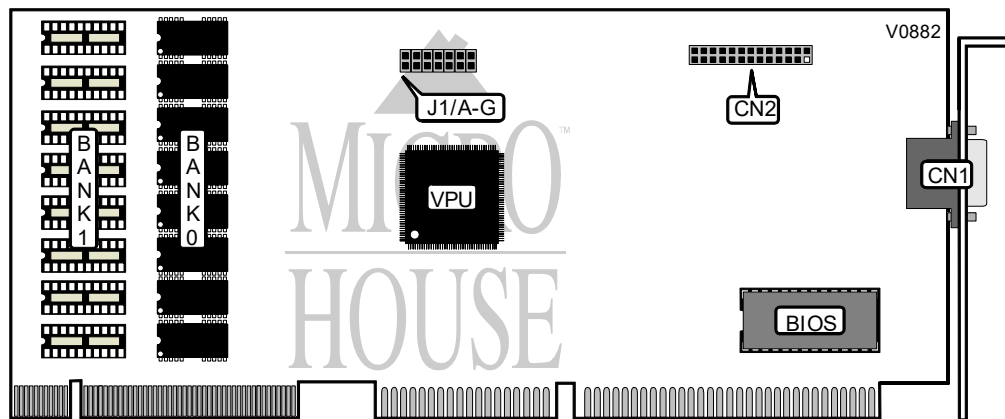

CONNECTIONS			
Purpose :	Location	Purpose :	Location
15-pin analog video port	CN1	VESA feature connector	CN2

MONITOR SELECT - J1				
Resolution/Vertical Frequency	Jumper E	Jumper F	Jumper G	
1280 x 1024 interlaced/43Hz	Open	Closed	Open	
640 x 480 non-interlaced/60Hz	Closed	Closed	Closed	
640 x 480 non-interlaced/70Hz	Open	Closed	Closed	
800 x 600 non-interlaced/56Hz	Closed	Closed	Open	
800 x 600 non-interlaced/60Hz	Closed	Open	Closed	
800 x 600 non-interlaced/70Hz	Open	Open	Closed	
1024 x 768 non-interlaced/60Hz	Closed	Open	Open	
1024 x 768 non-interlaced/70Hz	Open	Open	Open	

FACTORY CONFIGURED SETTINGS	
Jumper	Setting
J1/jumper C	Closed
J1/jumper D	Closed

Continued on next page...

FIRST INTERNATIONAL COMPUTER, INC.
VGA-805-V

...continued from previous page

DRAM CONFIGURATION				
Size	J /jumper A	J /jumper B	Bank 0	Bank 1
1MB	Closed	Open	(8) 256K x 4	None
2MB	Closed	Closed	(8) 256K x 4	(8) 256K x 4