


MIRO COMPUTER PRODUCTS, INC. MIROCRYSTAL 8S ISA

Category Video
Video Types Supported XVGA
Video Processor S3
Highest Resolution Supported 1280 x 1024
Data Bus Type 16-bit ISA
Memory Type DRAM
Maximum Onboard Memory 2MB

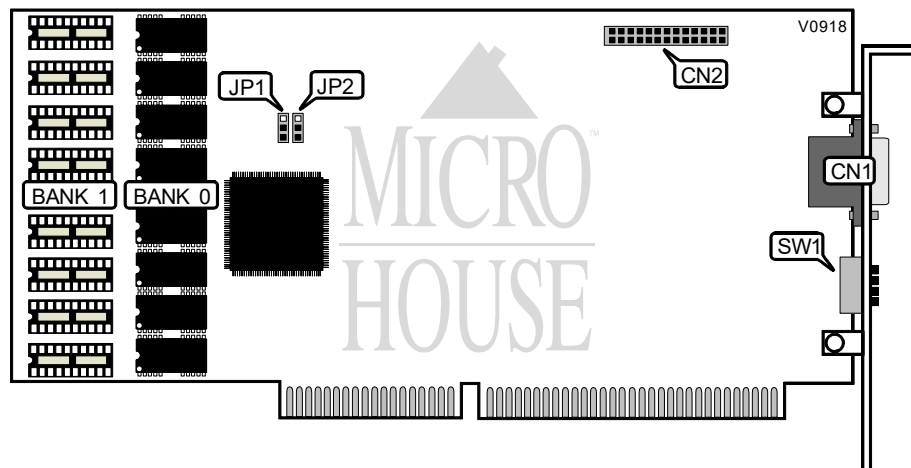

CONNECTIONS			
Position	Location	Position	Location
15-pin analog video port	CN1	VESA feature connector	CN2

ZERO WAIT STATE CONFIGURATION	
Setting	JP1
Disabled	Pins 1 & 2 closed
Enabled	Pins 2 & 3 closed

MONITOR TYPE SELECTION				
Type	SW1/1	SW1/2	SW1/3	SW1/4
35KHz Multi-frequency	On	On	On	Off
48KHz Multi-frequency	Off	Off	On	Off
58KHz Multi-frequency	On	Off	Off	Off
64KHz Multi-frequency	Off	Off	Off	Off

Continued on next page...

MIRO COMPUTER PRODUCTS, INC.
MIROCRYSTAL 8S ISA

... continued from previous page

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(8) 256K x 4	NONE
2MB	(8) 256K x 4	(8) 256K x 4

DRAM JUMPER CONFIGURATION	
Size	JP2
1MB	Pins 2 & 3 closed
2MB	Pins 1 & 2 closed